

MONITOUCH

V8

series



Safety Considerations

- For safe operation, read the instruction manual or user manual that comes with the product carefully or consult the distributor from which you purchased the product, before using the product.
- Products introduced in this catalog have not been designed or manufactured for such applications in a system or equipment that will affect human bodies or lives.
- Customers, who want to use the products introduced in this catalog for special systems or devices such as for atomic-energy control, aerospace use, medical use, passenger vehicle, and traffic control, are requested to consult the Hakko Overseas Sales Section.
- Customers are requested to prepare safety measures when they apply the products introduced in this catalog to such systems or facilities that will affect human lives or cause severe damage to property if the products become faulty.
- For safe operation, wiring should be conducted only by qualified engineers who have sufficient technical knowledge about electrical work or wiring.

Notes to consider before purchasing

- Appearance and specifications are subject to modification without prior notice due to technical improvements.
- Colors in the catalog may differ from the actual colors due to printing inaccuracies.
- Consult your distributor or us for further information about products in this catalog.

www.monitouch.com

 Hakko Electronics Co., Ltd.

Overseas Sales Department
890-1 Kamikashiwano-machi,
Hakusan, Ishikawa 924-0035, Japan

•Tel
+81-76-274-2144
•Fax
+81-76-274-5208
•E-mail
sales@hakko-elec.co.jp

Distributor

* Product specifications and design are subject to modification.
* Combined images are used for the screen images.
* Product colors may differ from colors in brochure photos due to printing.
* Windows and Excel are trademarks of Microsoft (USA) in the U.S. and other countries.
* Other company and product names in this brochure are registered trademarks.
* Printed with environment-friendly soy ink.



0806040000

Expanding the Possibilities of the Future

 Hakko Electronics Co., Ltd.

www.monitouch.com

MONITOUCH V8 series

For optimal performance, connectivity and usability
The MONITOUCH V8 series has expanded the potential of programmable operator interface panels.



Realize the Ideal



High Performance

The new MONITOUCH series has realized the best possible performance with a newly developed high-speed algorithm and a high level of visibility for efficient operation.

Connectivity

8-way communication with up to eight kinds of devices and two USB channels ensure high compatibility and expandability of your system.

Usability

User-friendly component parts and functional switches enable simple and speedy display configuration.


- 65,536 colors
- 30 fps video display in 16 million colors
- Analog switches
- Compatible with 8-way communication
- Equipped with two USB channels (master/slave)
- Multi-output memory
- ON delay/ OFF delay
- Conditional visibility
- Pop-up window
- Flash ROM 12.5MB/ SRAM 512KB
- Configuration software V-SFT
- Component parts
- MES interface
- Dimensions and part names
- System configuration
- Specifications
- Option
- Option list
- Customer service
- Product warranty

- P10
- P11
- P12
- P14
- P16
- P17
- P18
- P20
- P22
- P23
- P24
- P26
- P28
- P29
- P30
- P31

Our wide range of products allows you to select the one that best fits your needs.

TFT Display device SVGA Display resolution 64K Display color

		15.0 inches	12.1 inches	10.4 inches		8.4 inches	7.7 inches	5.7 inches	
<p>NEW</p> <h1>V8</h1> <p>series</p> <p>Revolutionary features for production sites: 8-way communication and 16-million colors high-resolution video display. As well as V8 series have the same panel cutouts as V7 series, the V7 screen program can be utilized in V8 series. A multi-feature model with the ultimate operator interface panel.</p>	High-performance model	<p>V815iX</p>  <p>TFT XGA 64K Color To be released in autumn 2008</p>	<p>V812iS/V812S</p>  <p>TFT SVGA 64K Color</p>	<p>V810iS/V810S</p>  <p>TFT SVGA 64K Color</p>	<p>V810iT/V810T</p>  <p>TFT VGA 64K Color</p>	<p>V808iSD/V808SD</p>  <p>TFT SVGA 64K Color</p>			
	Standard model				<p>V810iC/V810C</p>  <p>TFT VGA 64K Color</p>	<p>V808iCD/V808CD</p>  <p>TFT VGA 64K Color</p>	<p>V808iCH/V808CH</p>  <p>TFT VGA 64K Color To be released in winter 2008</p>	<p>V806iTD/V806TD</p>  <p>TFT QVGA 64K Color</p>	<p>V806iCD/V806CD</p>  <p>STN QVGA 64K Color</p>
<p>V7</p> <p>series</p> <p>Comes in a variety of models including large-size (15-inch XGA) and small-size (5.7-inch). A versatile and high-ranking series that can be widely used ranging from the net working to stand-alone.</p>	High-performance model	<p>V715X</p>  <p>TFT XGA 32K Color</p>	<p>V712iS/V712S</p>  <p>TFT SVGA 32K Color</p>	<p>V710iS/V710S</p>  <p>TFT SVGA 32K Color</p>	<p>V710iT/V710T</p>  <p>TFT VGA 32K Color</p>	<p>V708iSD/V708SD</p>  <p>TFT SVGA 32K Color</p>			
	Standard model				<p>V710C</p>  <p>TFT VGA 128 Color</p>		<p>V708CD</p>  <p>STN VGA 128 Color</p>	<p>V706TD</p>  <p>TFT QVGA 32K Color</p>	<p>V706CD</p>  <p>STN QVGA 32K Color</p>
<p>V6</p> <p>series</p> <p>Has all of the basic functions. Entry-level models that will satisfy your needs in superior usability and cost-effectiveness.</p>	Standard model					<p>8.9 inches V609E</p>  <p>EL 640 480 2 Color</p>	<p>V608CH</p>  <p>STN VGA 128 Color</p>	<p>V606eC</p>  <p>STN QVGA 16 Color</p>	<p>V606eM</p>  <p>STN QVGA MONO</p>



V812 series

One of the flagship models in V8 series offers you the highest level of performance.

12.1-inch model

High-performance model SVGA 65,536 colors



With Ethernet port
V812iS

Without Ethernet port
V812S

Options:
 AC power Analog V812iS, DC power Analog V812iSD, AC power Matrix V812iSM, DC power Matrix V812iSMD

Communication units

- OPCN-1 *1
- T-Link
- CC-Link *1
- Ethernet *1
- PROFIBUS-DP
- DeviceNet *1
- FL-net *1
- SX Bus

Optional units

- Video input + RGB input
- RGB input (2ch)
- Video input + sound output
- RGB input + sound output
- RGB output + sound output
- Sound output

Serial connection
 Modular 8-pin **P12**

- PLC
- Temperature controller/ Inverter
- Card recorder (CREC)
- Bar code reader
- V-I/O
- V-Link
- PLC ladder transfer
- Modbus slave
- Printer (serial)

Ethernet

- General PC
- Bar code reader

USB-A **P14**

USB-B **P14**

CF Card

Model	V812iS	V812S
Display size	12.1 inches	
Display device	TFT color LCD	
Resolution	800x600 dots	
Display colors	65,536 colors(without blinks) 32,768 colors(with blinks)	
Display memory	FROM (12.5MB)	
Backup memory	SRAM (512KB)	
Ethernet	100BASE-TX /10BASE-T Built-in	Option*1 (CU-03-3)
Communication I/F	Equipped	
Expansion I/F		
CF card I/F	Equipped	
USB I/F	Type A and B(Ver1.1)	
Video (4ch)	GU-00	
RGB input	GU-01	
RGB output	GU-02	
Video (2ch)+RGB input	GU-10	
RGB input (2ch)	GU-11	
Sound output	GU-00 ~ 03	
Communication unit	CU-00 ~ 08	
I/O unit	V-I/O	
Serial interface	D-Sub 9-pin CN1	RS-232C, RS-422/485, Asynchronous Data length: 7 bits, 8 bits, Parity: even, odd, none Stop bit: 1 bit, 2 bits Baud rate: 4800, 9600, 19200, 38400, 57600, 76800, 115200, 187500bps ²
	Modular 8-pin MJ1/MJ2	RS-232C · RS-422/485(2-wire), Asynchronous Data length: 7 bits, 8 bits Parity: even, odd, none Stop bit: 1 bit, 2 bits Baud rate: 4800, 9600, 19200, 38400, 57600, 76800, 115200
Compatibility	CE Marking ³	EN61000-6-2, EN61000-6-4
	UL/cUL ³	UL508, UL1604(Class1,Division2)
	RoHS directive	Complied

*1 Under development
 *2 When connected with SIEMENS MPI
 *3 Only with 24V DC models

Legend of icons

12.1 inches (inches) TFT Display device SVGA Display resolution 64K color Display colors 12.5 FROM FROM capacity 512K SRAM (byte) 3 Serial port Ethernet 100BASE-TX/10BASE-T Communication unit I/F CF card I/F USB I/F Power Supply Analog switch / Matrix switch Video input RGB input/output Sound output Option

V810 series

High-performance panels in 65,536 colors
 Three grades of models from standard to highly functional

10.4-inch model

High-performance model SVGA Highly-functional model VGA Standard model VGA



10.4 inches

With Ethernet port
V810iS

Options:
 AC power Analog V810iS, DC power Analog V810iSD

Without Ethernet port
V810S

Options:
 AC power Analog V810S, DC power Analog V810SD



10.4 inches

With Ethernet port
V810iT

Options:
 AC power Analog V810iT, DC power Analog V810iTD, AC power Matrix V810iTM, DC power Matrix V810iTMD

Without Ethernet port
V810T

Options:
 AC power Analog V810T, DC power Analog V810TD, AC power Matrix V810TM, DC power Matrix V810TMD



10.4 inches

With Ethernet port
V810iC

Options:
 AC power Analog V810iC, DC power Analog V810iCD, AC power Matrix V810iCM, DC power Matrix V810iCMD

Without Ethernet port
V810C¹

Options:
 AC power Analog V810C, DC power Analog V810CD, AC power Matrix V810CM, DC power Matrix V810CMD

*1 FROM 4.5Mbytes · SRAM 128Kbytes

CU-xx

Communication units

- OPCN-1 *4
- T-Link
- CC-Link *4
- Ethernet *4
- PROFIBUS-DP
- DeviceNet *4
- FL-net *4
- SX Bus

Optional units

- Video input + RGB input
- RGB input (2ch)
- Video input + sound output
- RGB input + sound output
- RGB output + sound output
- Sound output

Serial connection
 Modular 8-pin **P12**

- PLC
- Temperature controller/ Inverter
- Card recorder (CREC)
- Bar code reader
- V-I/O
- V-Link
- PLC ladder transfer
- Modbus slave
- Printer (serial)

Ethernet

- General PC
- Bar code reader

USB-A **P14**


USB-B **P14**

CF Card

Model	V810iS	V810S	V810iT	V810T	V810iC	V810C
Display size	10.4 inches					
Display device	TFT color LCD					
Resolution	800x600 dots			640x480 dots		
Display colors	65,536 colors(without blinks) / 32,768 colors(with blinks)					
Display memory	FROM (12.5MB)					FROM (4.5MB)
Backup memory	SRAM (512KB)					
Ethernet	100BASE-TX /10BASE-T Built-in	Option (CU-03-3) *4	100BASE-TX /10BASE-T Built-in	Option (CU-03-3) *4	100BASE-TX /10BASE-T Built-in	Option (CU-03-3) *4
Communication I/F	Equipped					
Expansion I/F	Equipped		Equipped			
CF card I/F	Equipped					
USB I/F	Type A and B(Ver1.1)					
Video (4ch)	GU-00		GU-00			
RGB input	GU-01		GU-01			
RGB output	GU-02		GU-02			
Video (2ch)+RGB input	GU-10		GU-10			
RGB input (2ch)	GU-11		GU-11			
Sound output	GU-00 ~ 03		GU-00 ~ 03			
Communication unit	CU-00~08					
I/O unit	V-I/O					
Serial interface	D-Sub 9-pin CN1	RS-232C, RS-422/485, Asynchronous Data length: 7 bits, 8 bits, Parity: even, odd, none Stop bit: 1 bit, 2 bits Baud rate: 4800, 9600, 19200, 38400, 57600, 76800, 115200, 187500bps ²				
	Modular 8-pin MJ1/MJ2	RS-232C · RS-422/485(2-wire), Asynchronous Data length: 7 bits, 8 bits Parity: even, odd, none Stop bit: 1 bit, 2 bits Baud rate: 4800, 9600, 19200, 38400, 57600, 76800, 115200				
Compatibility	CE Marking ³	EN61000-6-2, EN61000-6-4				
	UL/cUL ³	UL508, UL1604(Class1,Division2)				
	RoHS directive	Complied				

*2 When connected with SIEMENS MPI *3 Only with 24V DC models
 *4 Under development

10.4 inches (inches) TFT Display device VGA Display resolution 64K color Display colors 12.5 FROM FROM capacity 512K SRAM (byte) 3 Serial port Ethernet 100BASE-TX/10BASE-T Communication unit I/F CF card I/F USB I/F Power Supply Analog switch / Matrix switch Video input RGB input/output Sound output Option



V808 series

Compact yet functional panels in 65,536 colors. SVGA models are also available.

8.4-inch model

High-performance compact model SVGA Standard model VGA



8.4 inches TFT SVGA 64K color 12.5M FROM 512K SRAM 3ch serial COM I/F CE A-B USB DC power Analog

8.4 inches TFT VGA 64K color 12.5M FROM 512K SRAM 3ch serial COM I/F CE A-B USB DC power Analog

With Ethernet port
V808iSD

Without Ethernet port
V808SD

With Ethernet port
V808iCD

Without Ethernet port
V808CD^{*1}

^{*1} FROM 4.5Mbytes • SRAM 128Kbytes

V806 series

High-performance compact models

5.7-inch model

Standard model QVGA 65,536 colors Standard model QVGA (16 grayscale)



5.7 inches TFT QVGA 64K color 4.5M FROM 512K SRAM 2ch serial COM I/F A-B USB DC power Analog

5.7 inches STN QVGA 64K color 4.5M FROM 512K SRAM 2ch serial COM I/F A-B USB DC power Analog

5.7 inches STN QVGA MONO 4.5M FROM 512K SRAM 2ch serial COM I/F A-B USB DC power Analog

With Ethernet port
V806iTD

Without Ethernet port
V806TD^{*1}


With Ethernet port
V806iCD

Without Ethernet port
V806CD^{*1}

With Ethernet port
V806iMD


Without Ethernet port
V806MD^{*1}

^{*1} SRAM 128Kbytes

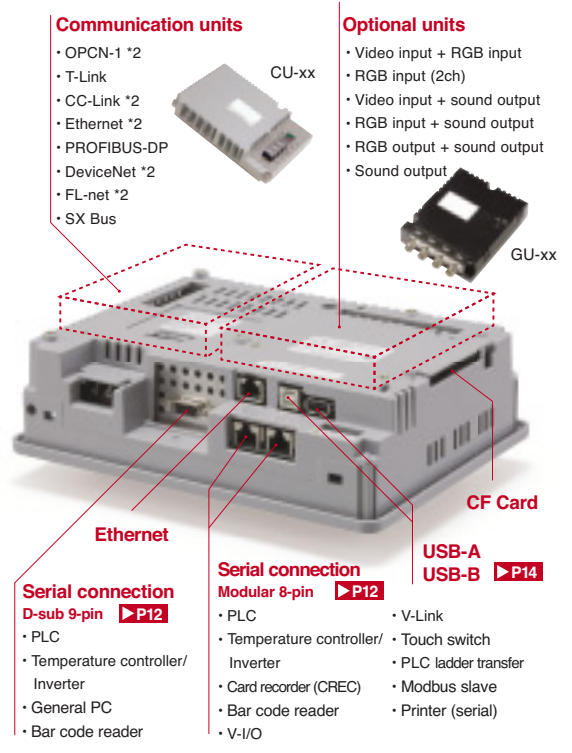

Model	V808iSD	V808SD	V808iCD	V808CD
Display size	8.4 inches			
Display device	TFT color LCD			
Resolution	800×600 dots		640×480 dots	
Display colors	65,536 colors(without blinks) 32,768 colors(with blinks)		65,536 colors(without blinks) 32,768 colors(with blinks)	
Display memory	FROM (12.5MB)		FROM (4.5MB)	
Backup memory	SRAM (512KB)		SRAM (128KB)	
Ethernet	100BASE-TX /10BASE-T Built-in	Option (CU-03-3) *2	100BASE-TX /10BASE-T Built-in	Option (CU-03-3) *2
Communication I/F	Equipped			
Expansion I/F	Equipped			
CF card I/F	Equipped			
USB I/F	Type A and B(Ver1.1)			
Video (4ch)	GU-00	-	-	-
RGB input	GU-01	-	-	-
RGB output	GU-02	-	-	-
Video (2ch)+RGB input	GU-10	-	-	-
RGB input (2ch)	GU-11	-	-	-
Sound output	GU-00 ~ 03	-	-	-
Communication unit I/O unit	CU-00 ~ 08			
Serial interface	V-I/O			
D-Sub 9-pin CN1	RS-232C, RS-422/485, Asynchronous Data length: 7 bits, 8 bits, Parity: even, odd, none Stop bit: 1 bit, 2 bits Baud rate: 4800, 9600, 19200, 38400, 57600, 76800, 115200, 187500bps ^{*3}			
Modular 8-pin MJ1/MJ2	RS-232C • RS-422/485(2-wire), Asynchronous Data length: 7 bits, 8 bits Parity: even, odd, none, Stop bit: 1 bit, 2 bits Baud rate: 4800, 9600, 19200, 38400, 57600, 76800, 115200			
CE Marking	EN61000-6-2, EN61000-6-4			
UL/cUL	UL508, UL1604(Class1,Division2)			
RoHS directive	Complied			

^{*2} Under development ^{*3} When connected with SIEMENS MPI

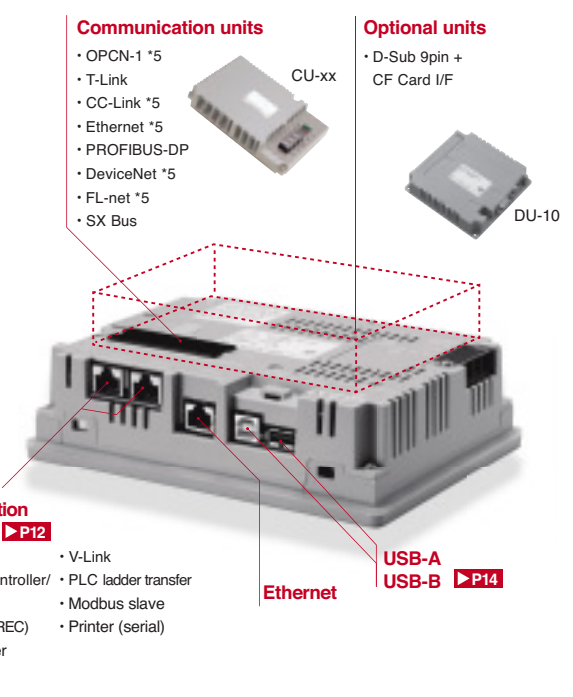

Model	V806iTD	V806TD	V806iCD	V806CD	V806iMD	V806MD
Display size	5.7 inches					
Display device	TFT color LCD		STN color LCD		STN monochrome LCD	
Resolution	320×240 dots		320×240 dots		320×240 dots	
Display colors	65,536 colors(without blinks) 32,768 colors(with blinks)		65,536 colors(without blinks) 32,768 colors(with blinks)		16 grayscale (with blinks)	
Display memory	FROM (4.5MB)					
Backup memory	SRAM (512KB)	SRAM (128KB)	SRAM (512KB)	SRAM (128KB)	SRAM (512KB)	SRAM (128KB)
Ethernet	100BASE-TX /10BASE-T Built-in	Option (CU-03-3) *5	100BASE-TX /10BASE-T Built-in	Option (CU-03-3) *5	100BASE-TX /10BASE-T Built-in	Option (CU-03-3) *5
Communication I/F	Equipped					
CF card I/F	Equipped ^{*2}					
USB I/F	Type A and B(Ver1.1)					
Options	Communication unit CU-00~08					
I/O unit	V-I/O					
D-Sub 9-pin CN1	RS-232C, RS-422/485, Asynchronous Data length: 7 bits, 8 bits, Parity: even, odd, none Stop bit: 1 bit, 2 bits Baud rate: 4800, 9600, 19200, 38400, 57600, 76800, 115200bps					
Modular 8-pin MJ1/MJ2	RS-232C • RS-422/485(2-wire) ^{*3} , Asynchronous Data length: 7 bits, 8 bits Parity: even, odd, none Stop bit: 1 bit, 2 bits Baud rate: 4800, 9600, 19200, 38400, 57600, 76800, 115200, 187500bps ^{*3}					
CE Marking	EN61000-6-2, EN61000-6-4					
UL/cUL	UL508, UL1604(Class1,Division2)					
RoHS directive	Complied					

^{*2} Available only when equipped with DU-10 (option)
^{*3} Available only when connected with SIEMENS MPI (MJ2 only). Not compatible with D-Sub 9-pin (option)
^{*4} MJ2 is connectable with RS-422 (4-wire)
^{*5} Under development

Legend of icons

12.1 inches (inches)
 TFT Display device
 SVGA Display resolution
 64K color colors
 12.5M FROM capacity
 512K SRAM (byte)
 3ch serial Serial port
 Ether Ethernet 100BASE-TX/10BASE-T
 COM I/F Communication unit I/F
 CF CF card I/F
 A-B USB I/F
 AC power Power Supply
 Analog Matrix Analog switch / Matrix switch
 Video input
 RGB input/output
 Sound output
 Option



Display Features

Improved visibility for operator interface panels

Great power of the visibility facilitates the operation by high-resolution and high-speed video display.

High-resolution Display

65,536 colors^{*1}
(32,768 colors with blinks)

High-resolution display of 65,536 colors without blinks and 32,768 colors with blinks enables clear display of JPG and BMP images. Realistic appearance of photos, illustrations and 3D parts improves visibility and makes it easy for operators to quickly grasp the conditions.




The image shown below is not an actual display image.

*1 Except V806iMD/V806MD

High-level images are displayed in real time without missing any information


Display of 30 fps video images in 16 million colors^{*2} First in Industry

High-speed displaying of 30 frames per second is possible. Even displays for production of a short tact time can be made without any delay.

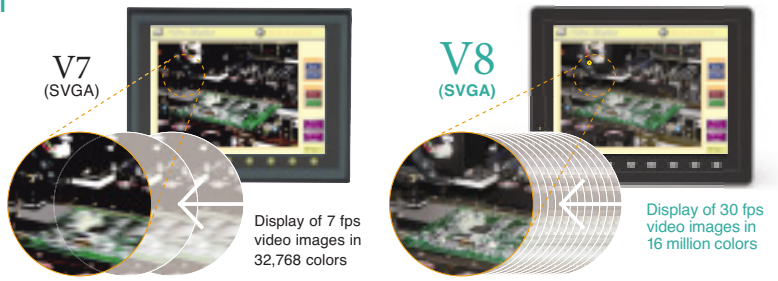

Monochrome display with 256 gradations^{*2}

Monochrome images that are often used by image processor can be displayed more clearly. The reproduction capacity for gradation and pattern-indented surfaces has been drastically improved.

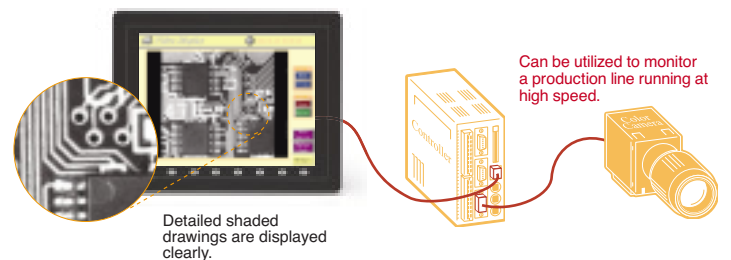

Detailed shaded drawings are displayed clearly.

*2 For V808iS, 260,000-color displays and 64-gradation monochrome displays are possible.

Locating the cause of trouble by monitoring with video

Motion picture facilitates locating the cause of trouble when it occurs.

Available in autumn 2008

Clear and smooth letters

The stroke font can be displayed to appear smooth even for magnified characters.

The stroke font is defined by lines. Since it does not depend on the resolution of the device, which is different from the bitmap font, fonts can be magnified or shrunk freely. Unicode enables you to edit the project in various languages.

Language		Japanese	English/European	Traditional Chinese	Simplified Chinese	Korean	Central European	Cyrillic	Greek	Turkish	Unicode(UTF-8)
Bitmap font	Non-gothic	●	●	●	●	●	●	●	●	●	●
	Gothic	●	●	×	×	×	×	×	×	×	×
Stroke font		●	●	●	●	●	●	●	●	●	●

Operation Features


"User-oriented operability" by high-speed and smooth display

High-speed accelerator and algorithm ensure stress-free operation.

Free switch layout with analog resistive switches

Analog resistive switch


Analog resistive switches are used for MONITOUCH. Freer switch layout facilitates screen designing while more intensive operation display can be produced.

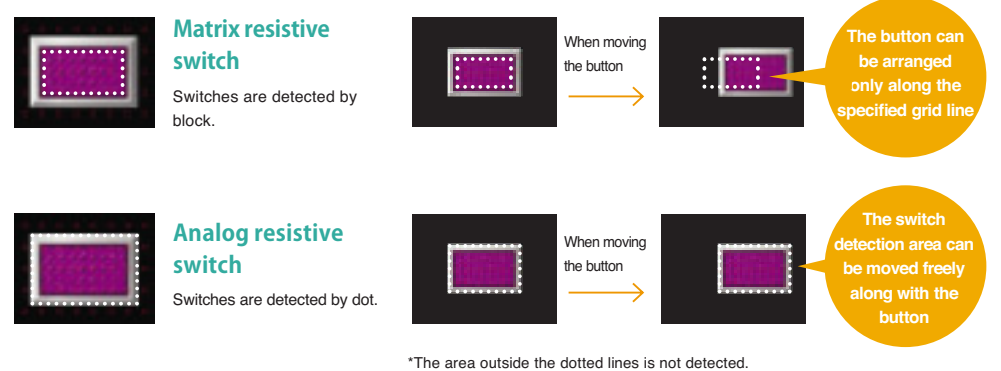

Slider switch

Available in summer 2008


Slider switches enable data entry without inputting data using the numeral key pad. Values can be modified easily and quickly, even for a fine adjustment.



Scroll bar

Available in summer 2008

The desired item can be selected by the scroll bar in the same manner as with the Windows® operation system. This function is most suitable for alarm display.

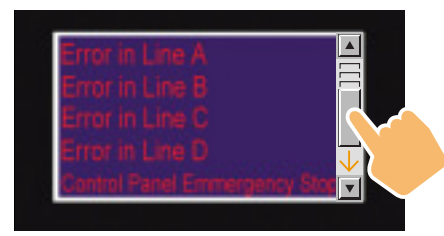

Memo pad function

Analog resistive switches allow you to use MONITOUCH as a memo pad for hand writing. You can draw a picture or a message on the display for use as a message board at production sites.



High-speed accelerator and algorithm ensure speedy, high-quality displays as well as higher usability in panel operation.

V8 series has drastically improved the processing capacity for drawing, calculation and communication in terms of smooth drawing and quick response.

Speedy drawing
V8 is equipped with a high-speed graphic accelerator, which improves speed for drawing graphics and characters.

High-speed communication
High-speed communication with PLCs is possible. By improving communication efficiency, the cycle speed can be shortened even when linked with more than two PLCs.

Quick response
Switch response speed has been shortened by efficient data processing and task assignment.



Communication Features

Multi-communication using the gateway function

Is capable of the connection with up to eight devices by combining Ethernet and serial communication. More advanced and expanded network can be now realized.

Connectable with up to eight different kinds of devices and different manufacturers' PLCs

8-way communication

A combination of Ethernet (eight protocols) and serial communication (three protocols) allows the 8-way communication, which enables connection among a V8 and up to eight kinds of devices consisting of PLCs and peripherals of different manufacturers.


- Simultaneous communication and data transfer with eight kinds of devices
- Simultaneous monitoring and operation of multiple PLCs and peripherals
- Linkage between a V8 and various devices on the LAN network using the gateway function

Network Examples

Example 1 Serial connection (three ports)

Making a network linked with various automation devices


PLCs and peripherals of up to three kinds of units can be connected by serial connection. Even though two or more types of temperature controllers and inverters are used, they can be connected with one V8.

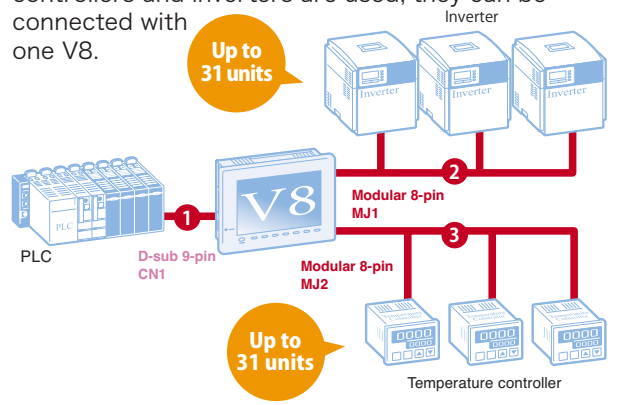

Example 2 Serial connection and Ethernet

Integrated management of up to eight kinds of devices

In addition to conventional connection with temperature controllers and PLCs via 2-way serial communication, connection via Ethernet is possible.

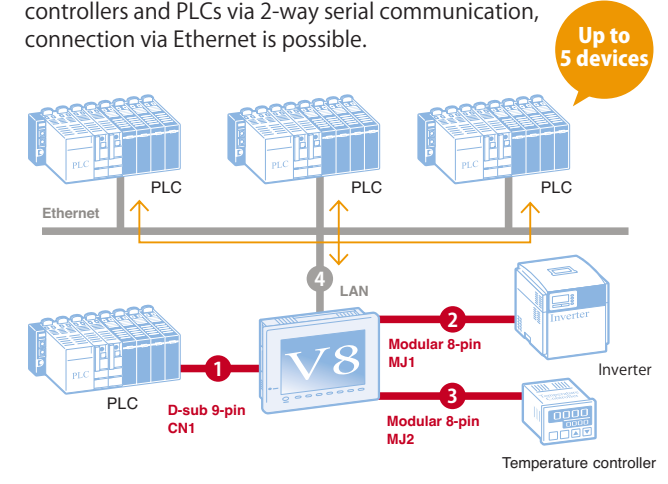


Example 3 Ethernet First in Industry

Used as a gateway for different types of networks

V8 can connect with eight kinds of PLCs via Ethernet. In addition, it can be used as a gateway with another network by adding an Ethernet port using the optional unit (CU-03-2).

For example, data can be transferred between a production site and the office freely by using a V8. V8 works as the gateway of multiple networks of the production site and the office without increasing data load on the networks.

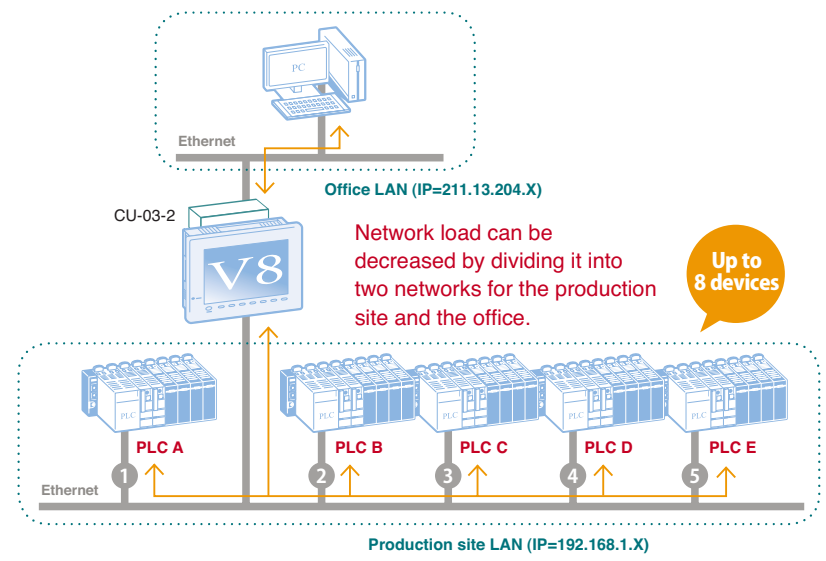


A variety of ingenious uses

8-way communication offers various functions and boosts your convenience

case 1 Analysis of trouble

Integrated management of different manufacturers' PLCs


A production line that contains various manufacturers' equipment has various types of PLCs. By using 8-way communication, you can monitor the condition of all the PLCs through a V8 and analyze trouble at a remote place without visiting the site.

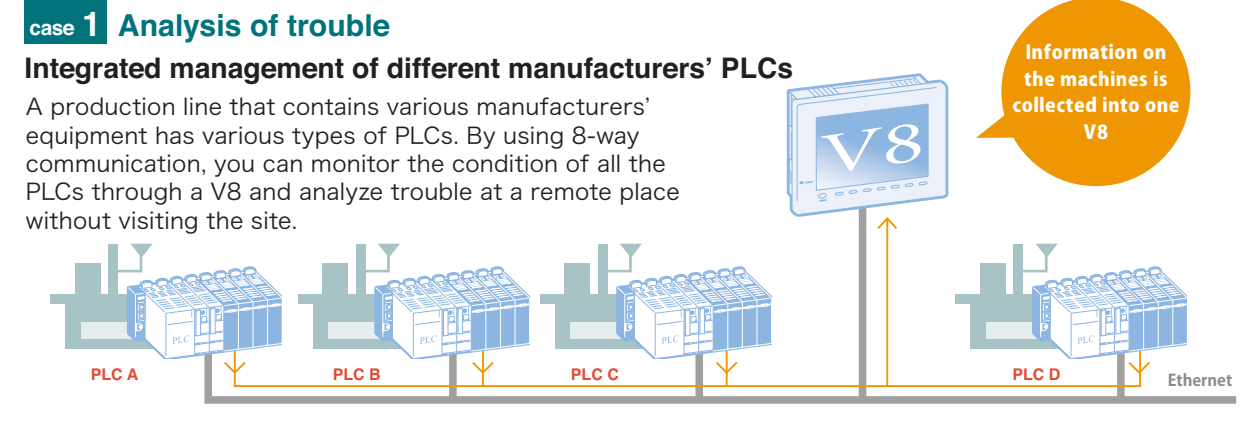

case 2 Reading of production conditions and set data

Connectable with various kinds of equipment


Even when the system consists of various kinds of equipment, it is easy to read and write the data of the individual units via 8-way communication. By using a V8 as a gateway, it is possible to connect with the office host system.

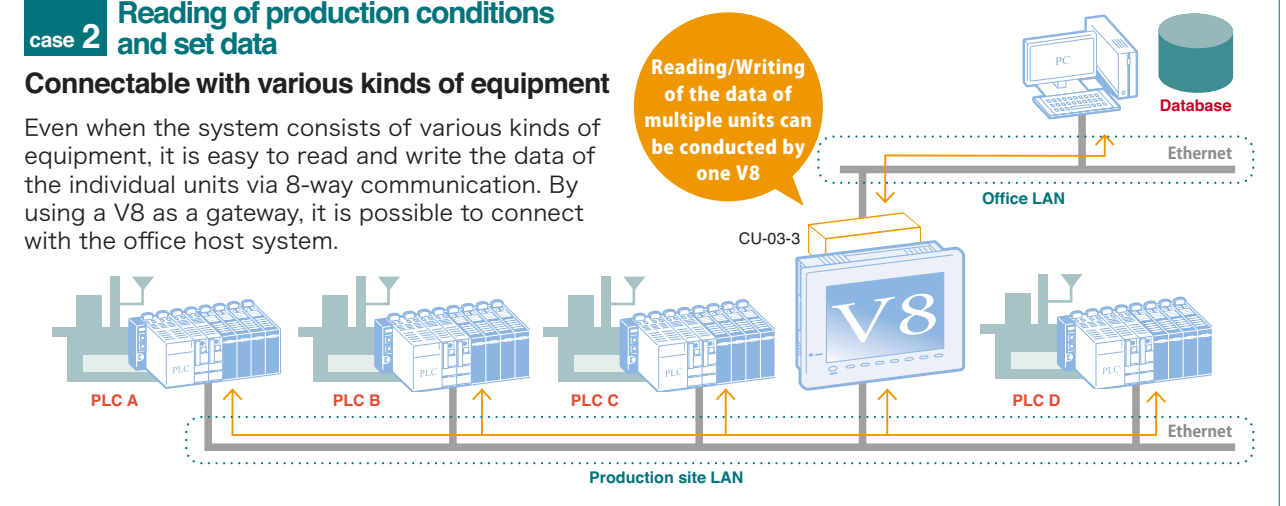

case 3 Real-time indication of information


High-speed data sampling

A V8 is connected to a PLC via two communication lines: one for operation/monitoring, and the other for sampling, a setup that enables high-speed and stable sampling.

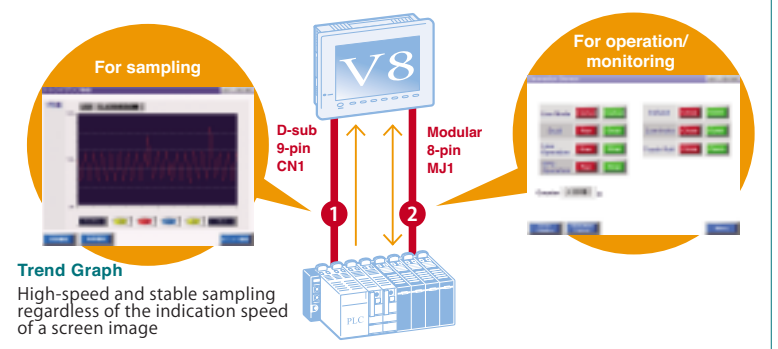

Products
Display/Operation Features
Communication Features
Expandability
Usability
Configuration Software (V-SFT)
Component Parts
Expandability with MES/Ethernet
Dimensions and Part Names
System Configuration
Specifications
Option
Option List
Customer Service
Product Warranty

Products
Display/Operation Features
Communication Features
Expandability
Usability
Configuration Software (V-SFT)
Component Parts
Expandability with MES/Ethernet
Dimensions and Part Names
System Configuration
Specifications
Option
Option List
Customer Service
Product Warranty



Expandability (USB master/slave)


High compatibility with peripherals makes for more user-friendliness

All models are equipped with two types of USB interfaces fitted as standard feature.


High-speed transfer of large-volume data and easy connection to printers

Slave (USB-B)



PLC Ladder Program Transfer Available in summer 2008
 PLC ladder programs can be written or monitored with your PC through the USB port of V8. High-speed ladder transfer is possible.



High-speed Transfer of Screen Data
 Large-volume screen program edited by "V-SFT" configuration software can be downloaded and uploaded at high speed.

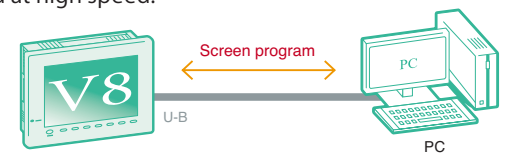


Compatible with PictBridge Printers
 V8 is compatible with PictBridge printers. With PictBridge-compatible printers, production data such as daily and monthly reports can be printed out easily.

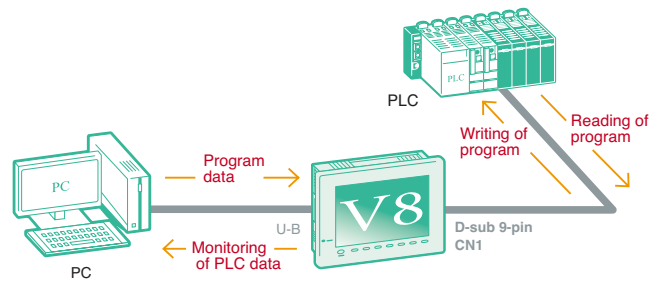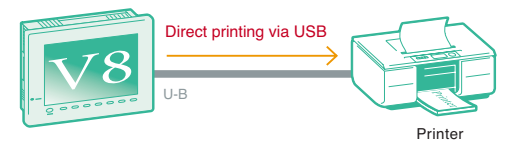


Compatible with PC peripherals including a USB keyboard and a USB mouse

Master (USB-A)


Card Reader/Writer
 Connection with our "USB-CFREC" or commercial CF card readers/writers increases the versatility.




Compatible with USB Keyboard
 In addition to conventional software keyboards, a USB keyboard can be connected, which facilitates the entry of long product numbers and code numbers.



USB Interfaces Fitted on the Front
 Optional interfaces "UA-FR" and "UB-FR" enable USB ports to be fitted on the front of the display for easy access.



Compatible with USB Mouse
PC operation
 By installing an optional RGB input unit "GU-01", "GU-10" or "GU-11", PC screen can be displayed on V8. You can operate the PC screen using a USB mouse.



Output on Large Displays
 By installing the optional RGB output unit "GU-02", V8 screen program can be displayed on a large screen and it can be operated using a USB mouse.

Expandability (CF Card)


For superior information management

Two-drive system for versatile uses of CF cards

CF card interface and USB reader/writer

Equipped with Two Drives


In addition to the built-in CF card interface, MONITOUCH is equipped with a USB interface for a CF card reader/writer, which can be used simultaneously. Since CF card data can be copied to another card while V8 is being used, the V8 performance will not be inhibited. These functions expand the versatility of MONITOUCH.

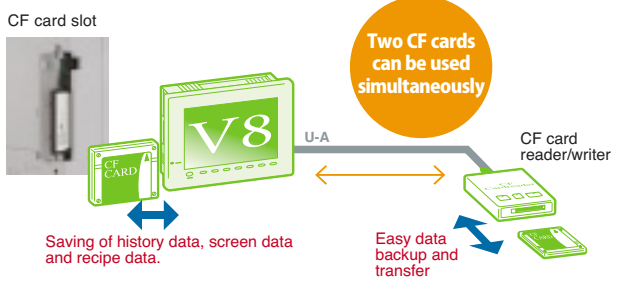

Built-in Drive for Constant Use


case 1 Recipe Data

Production conditions can be saved in a CF card in CSV format. For preparation of production, data can be read out from a CF card and written in the PLC. It is also possible to read out data from PLC.

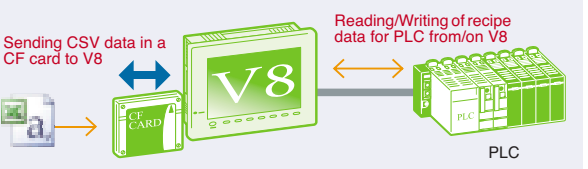

case 2 Sampling


Production data and alarm history can be sampled and saved. Since the data is saved in CSV format, it can be easily edited in Excel.

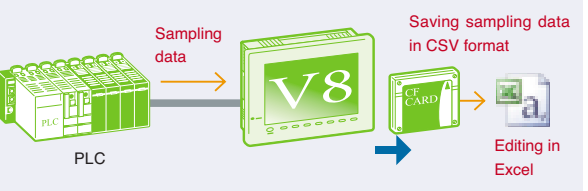

USB Drive for Easy Data Delivery


case 3 Screen Data Transfer

Because screen data can be saved on a CF card and read into V8 at a production site by means of a CF card reader/writer, there is no need to bring your PC.

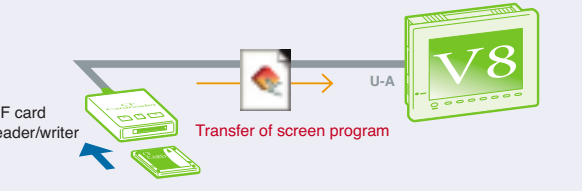

case 4 Data Delivery

While using a CF card as a built-in drive, the card data can be copied to another CF card via the USB interface. Sampling data and recipe data can be backed up easily while keeping the CF card in the slot.

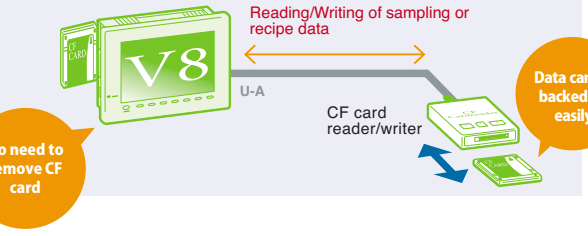

PC-friendliness

Compatible with FAT32

Available in summer 2008

FAT has some limitations. For example, a file name cannot exceed eight characters in length, and extensions must be within three characters. FAT32 allows a data file to have a longer file name, which improves compatibility with PCs.

Impressive Screen

Screen program capacity can be increased by means of a CF card

A CF card can be used as an extension unit for editing the screen. You can design an impressive screen freely without having to worry about data capacity.

Products
Display/Operation Features
Communication Features
Expandability
Usability
Configuration Software (V-SFT)
Component Parts
Expandability with MES/Ethernet
Dimensions and Part Names
System Configuration
Specifications
Option
Option List
Customer Service
Product Warranty

Products
Display/Operation Features
Communication Features
Expandability
Usability
Configuration Software (V-SFT)
Component Parts
Expandability with MES/Ethernet
Dimensions and Part Names
System Configuration
Specifications
Option
Option List
Customer Service
Product Warranty



Easy Configuration 1

Highly functional switches

Switches with various functions are standardized. No macro or PLC ladder programming is required.

Various switches that meet the individual needs


Multi-output

In order to meet diversified needs, switches with various functions are installed.

Multi-output memory Output up to 16 positions

Switches have a multi-output function. Turning on just one switch makes the other switches turn off. It is also possible to output bit signals up to 16 positions.

For example, when you turn on one switch, the others turn off simultaneously.

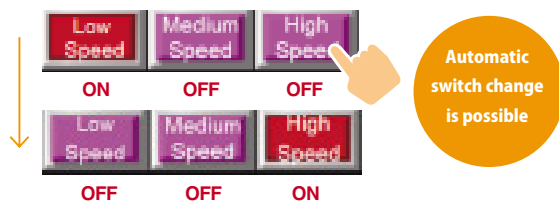

Indication depends on the value


In addition to the bit ON/OFF status, it is possible to set various switch conditions according to the value.

Available in summer 2008




Setting the switch timing freely ON delay

It is possible to set switch functions such as requiring holding down the button for a certain time. This function prevents a false operation of the switch.

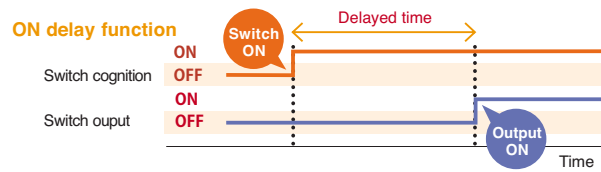

Setting the switch timing freely OFF delay

Switch output is retained for a certain time after reset of the switch.

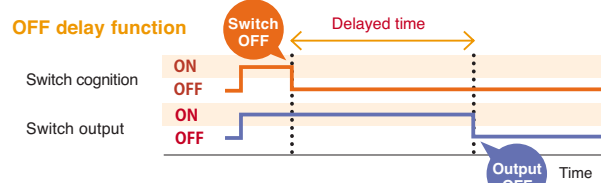

Indication according to individual production sites needs

Conditional Visibility Static conditional visibility


You can set whether or not to show an item while creating a screen, item by item. One screen data can be utilized for different applications.



Conditional visibility according to the security level

The display can be arranged according to security level. The security level is controlled by passwords. For example, different displays are shown for a maintenance engineer and an operator.

Available in summer 2008

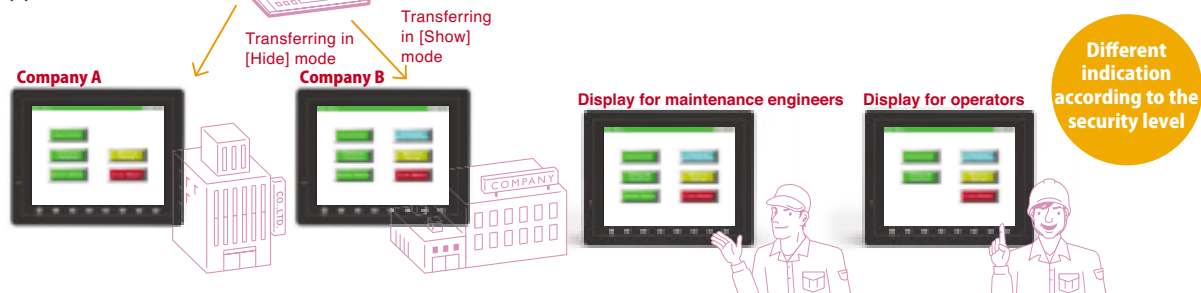

Dynamic conditional visibility

Whether items are indicated or not is automatically determined according to the memory condition.

* The above screens are subject to change as development progresses.

Easy Configuration 2

Convenient functions to meet users' demands


Flash ROM, a large capacity of SRAM and many other functions for more user friendliness

High-capacity memory facilitates screen design

12.5MB^{*1} Flash ROM

V8 has 12.5MB^{*1} Flash ROM as standard — twice^{*2} the capacity of our previous model. In addition, by saving data in a CF card, you can design the screen without caring memory capacity.

^{*1} SRAM capacity differs depending on the models. See Performance Specifications (P26, P27) for details
^{*2} Comparison with V7

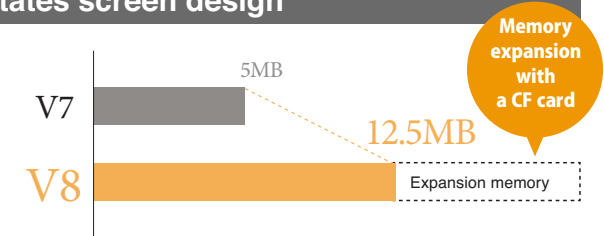


For saving large-volume event history data

512KB^{*1} SRAM as Standard

The built-in SRAM capacity has been expanded to 512KB^{*1} — eight times larger than that of our previous model. The capacity for backup of sampling data, operation information, alarm information, etc. has been greatly increased to comply with the ISO standard for information management. The large memory capacity enables quick data processing.

^{*1} SRAM capacity differs depending on the models. See Performance Specifications (P26, P27) for details

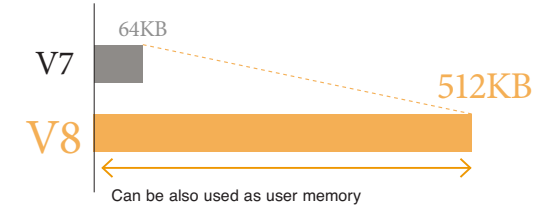


Referring to operation history to analyze causes of error

Operation Log

The operation history for switches and values entered on MONITOUCH can be recorded in chronological order. After entering the registered password, you can refer to all the details of operation history, such as who the operator was, which operations were performed, and how the operations were conducted.


Available in summer 2008

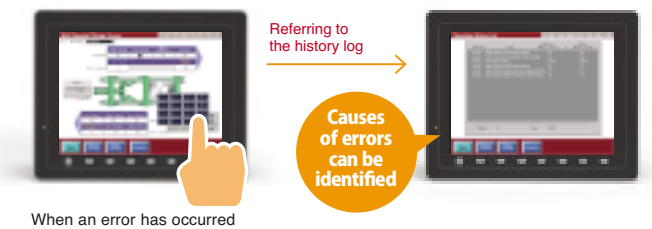

Easy-to-make pop-up message

Pop-up Window

Pop-up window is standardised. No programming or individual message edit is required for making a dialog such as an alert.

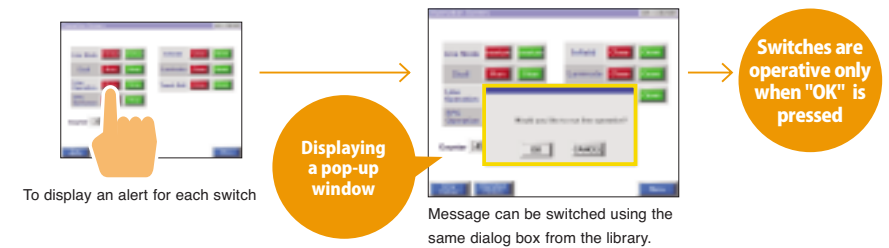



For easy communication between production sites and the office

Memo Pad Function

V8 can be used as a memo pad for communication between production sites and the office as easily as the telephone or e-mail. Display data, which is entered by means of the keyboard or handwriting, can be transferred to PCs in the office or other V8 via Ethernet.

Available in summer 2008

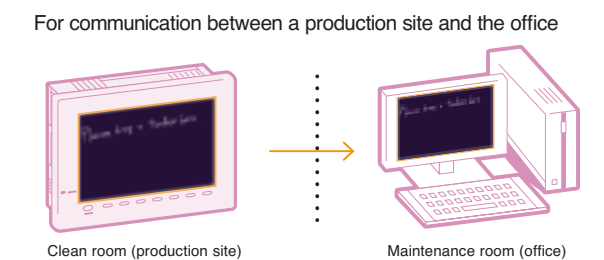



Products
Display/Operation Features
Communication Features
Expandability
Usability
Configuration Software (V-SFT)
Component Parts
Expandability with MES/Ethernet
Dimensions and Part Names
System Configuration
Specifications
Option
Option List
Customer Service
Product Warranty

Products
Display/Operation Features
Communication Features
Expandability
Usability
Configuration Software (V-SFT)
Component Parts
Expandability with MES/Ethernet
Dimensions and Part Names
System Configuration
Specifications
Option
Option List
Customer Service
Product Warranty

Configuration Software [V-SFT]


New V-SFT for easy screen configuration

Multiple windows provides immediate access to all application data.

Overall View of All the Devices

Project View (1)

- System tree diagrams show the configuration of files and screens in the entire system.
- Easy viewing and modification of the contents and configuration of each block

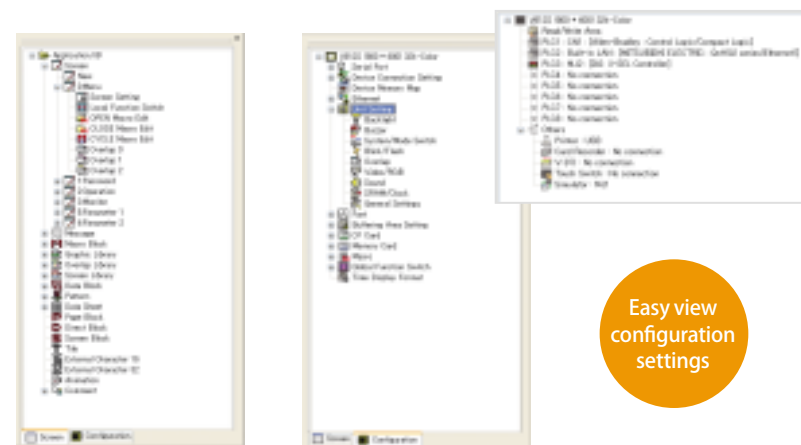


Easy view configuration settings

[Screen] and [Configuration] windows are easily switched by clicking tabs.

Quick Debugging on Your PC

Emulator for Easy Debugging


With the emulation of V-SFT Ver.5, data debugging is possible on your PC without V8 or PLC.

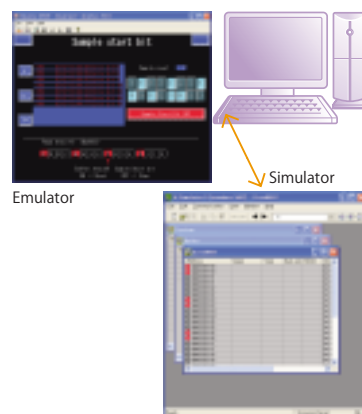

Quick Arrangement with Component Parts

Parts View (2)

- Various parts are listed for each item.
- Select a part, and drag & drop it on the configuration window.

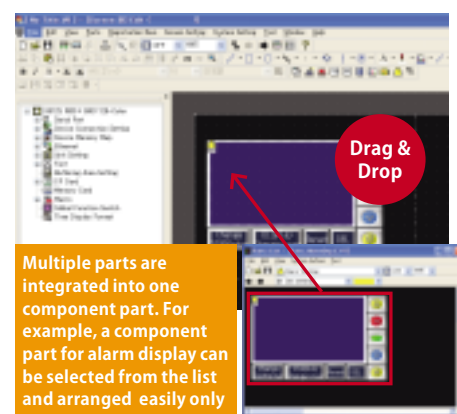


Multiple parts are integrated into one component part. For example, a component part for alarm display can be selected from the list and arranged easily only by drag and drop.

Easy and Speedy Display Configuration

Auto Size Change


When using screen data from a panel with different screen resolution, screen size is automatically adjusted to your selected model.

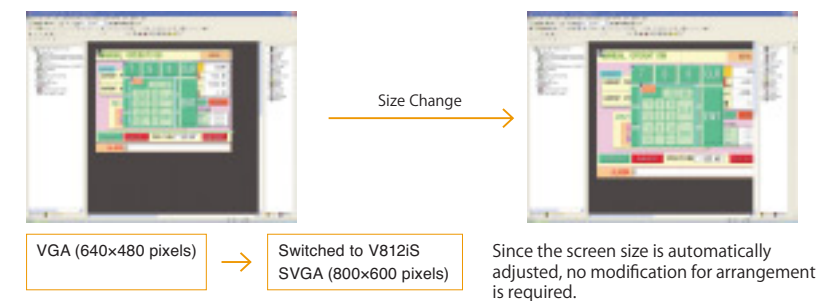

Convenient Item View (3)

Direct editing


Memory condition, coordinates, switch names can be entered in the item view. Memory address, position, and text can be directly entered in the item list.



Easy editing by selecting items

Coordinate items view


Utilize [Display setting] in the item list to minimize or maximize item properties in the windows. This system facilitates efficient management of information.

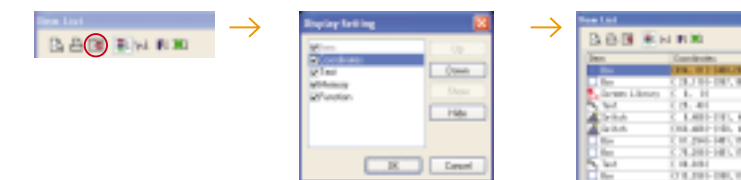

Enhanced Batch Change Functions

Additional items for batch change

More items can be changed simultaneously by batch change.

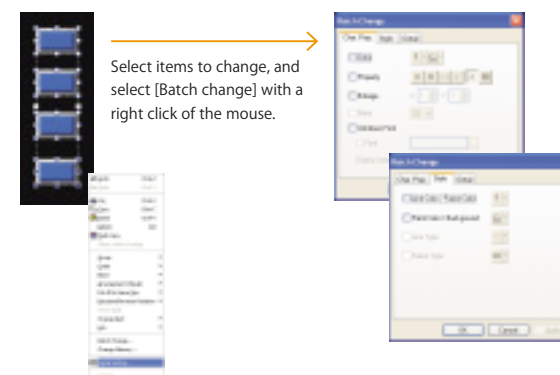


Batch change with the item view (4)

Multiple items can be selected to change the setting simultaneously on the item view window.

<Available items>

Switches, lamps, values, characters, messages, bar/circle graphs, panel meters, closed-area/statistical graphs

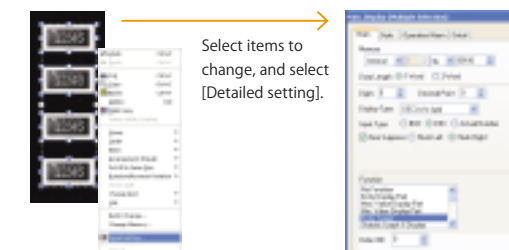


MONITOUCH V-SFT Ver. 5

V-SFT Requirements

PC	PC/AT compatible machine with Windows
OS	Windows 98/ Me/ NT Version 4.0/ 2000/ XP/ 64 edition/ Vista 32bit*
CPU	Pentium III 800 MHz or higher (Pentium IV 2.0 GHz or higher is recommended.)
Memory	512 MB or more
Hard disk	For installation: 850 MB or more available space
CD-ROM Disk drive	24 times or faster
Display	Resolution of 1,024 × 800 (XGA) or higher
Color indication	High color (16 bit) or higher

* When installing in Windows NT Ver.4/ 2000/ XP/ 64 edition/ Vista 32bit, administrator authority is required.



Component Parts


“Component Parts” facilitate screen configuration.

Convenient tool assists you in creating functional screens instantly.

Quick screen configuration using integrated “Component Parts”


Component Parts First in Industry

In “Component Parts,” various functions and macros have been arranged according to purpose. You can create a functional screen instantly by simply selecting a “Component Parts” from the parts list and arranging it on the screen.

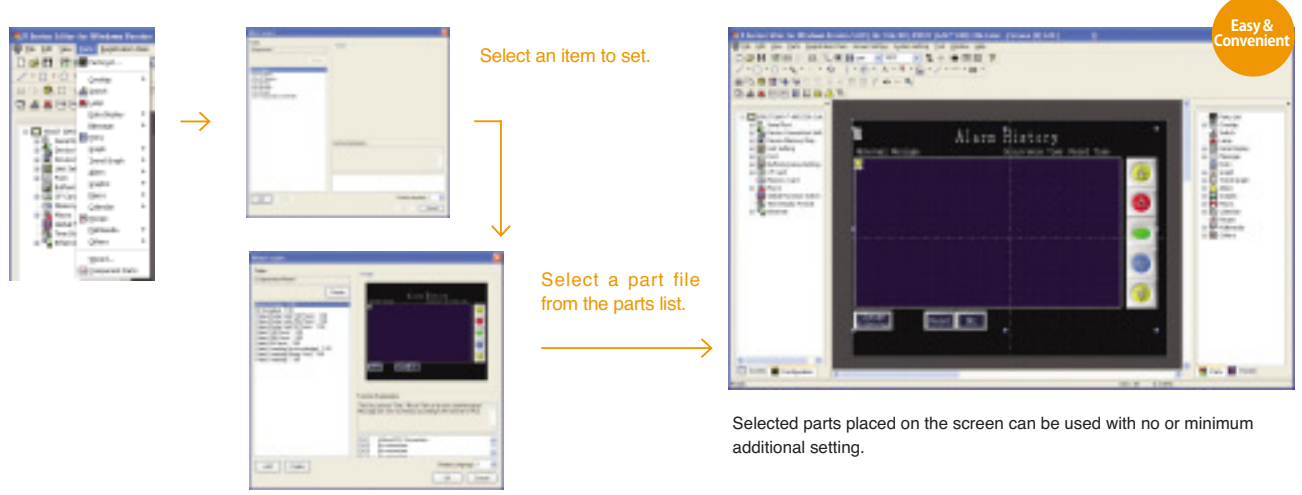


Point 1 Easy Screen Configuration

You can create multifunctional screens using integrated “Component Parts.” When arranging on a screen that contains other messages or setting windows, a “Component Part” can be used regardless of overlapping of settings or windows.

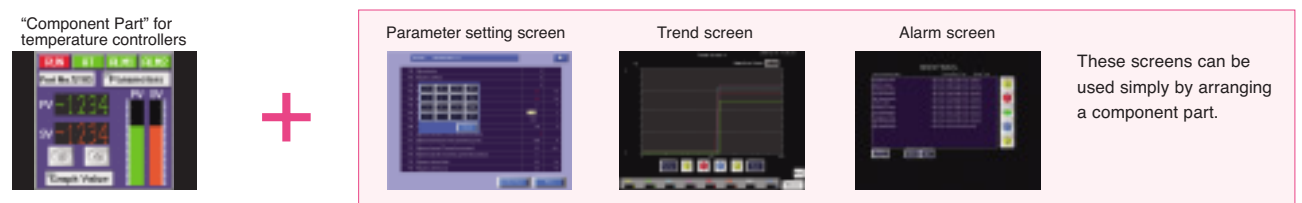

Point 2 Easy Utilization of Resource

“Component Parts” contain all necessary settings for operation, so they don’t need any additional settings when used on other displays. They can be reused simply by copying and pasting.

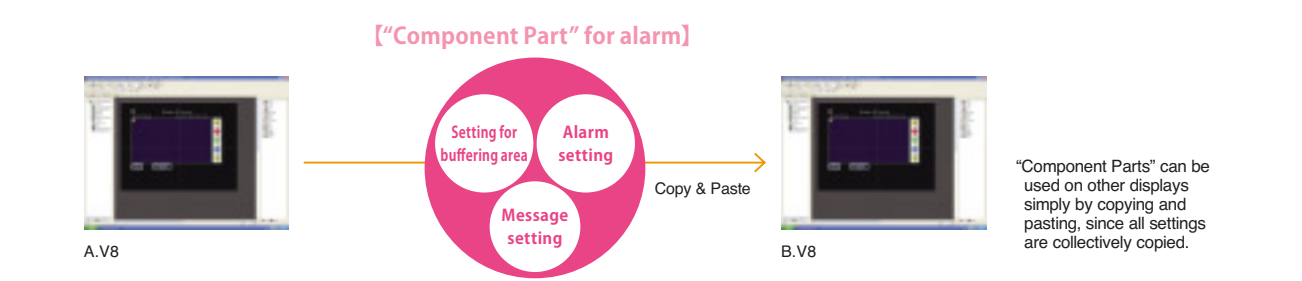

Point 3 Simple Setting View

After arranging “Component Parts,” they can be easily used simply by setting addresses and text.

Example of Setting View (“Component Part” for alarm history)

Memory setting

Text setting

Example of Setting View (“Component Part” for alarm history)
Set an address for alarm monitoring.


Set a text for alarm messages.

Easy and simple

All settings for alarm history can be edited in one menu.


Point 4 Batch Change of Addresses/Text

When the same address or text is used for multiple screens, all the settings can be changed simultaneously on the setting view simply by registering it in the address/text table of a “Component Part.”

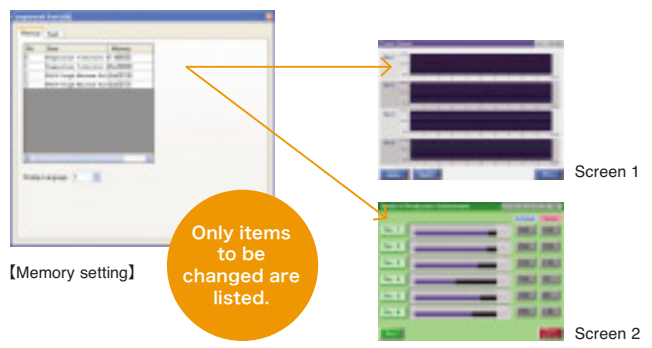

Point 5 Authorization by Passwords

Setting a password for a “Component Part” prevents the settings for the part from being changed by unauthorized persons. Customers can use a “Component Part” without having to worry about tampering of the setting.

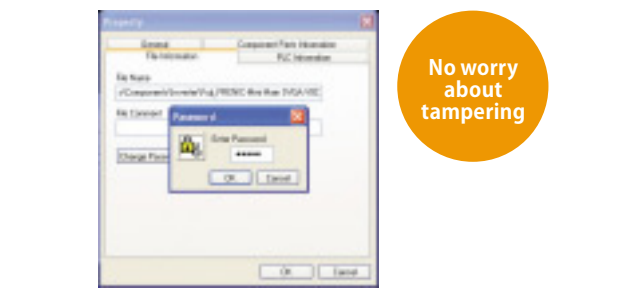

Point 6 Various “Component Parts”

“Component Parts” with various functions are available. They can be selected from the parts list according to your purpose to configure displays promptly.

Examples of “Component Parts”

Temperature controller

Displays for monitoring and parameter setting of temperature controllers can be made easily.

Inverter

Displays for monitoring and parameter setting of inverters can be made easily.

Robot controller


Displays for monitoring and operation setting of robots can be made easily.

I/O monitor

Displays for I/O monitoring of PLCs can be made easily.

Date setting

Displays for date setting can be made easily.



Expandability via MES*/ Ethernet Supporting the construction of advanced MES

V8 networking promotes the integration of sales, production management and manufacturing at low cost.

Reinforcing your production management through connection to the database

MES* interface function

Data for production records, defect quantity, error causes and various kinds of information can be sent to the MES database server via V-Server in SQL. Communication with the database is possible without a gateway PC or complicated programming.

No Programming Required


Data can be saved in the database server by simple setting on V-SFT — no programming is required.

Preventing data loss

All data transferred to the database is saved with the error log so that it is completely secure.

Decreasing system load

Data can be transferred to the database server when conditions are fulfilled. The server does not need to keep monitoring production, so the load on the system can be decreased.

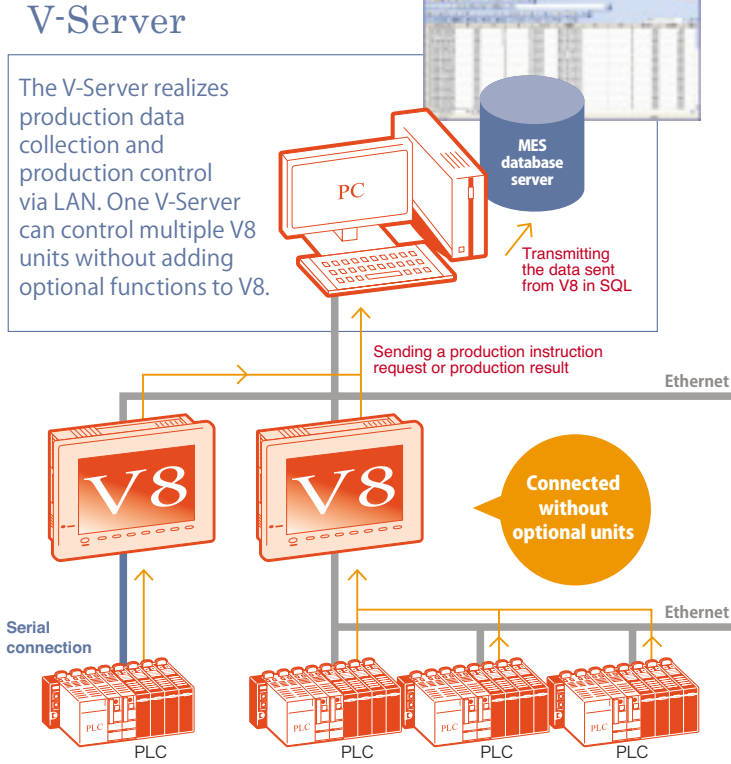

* [MES]: The "Manufacturing Execution System" is for optimizing product quality, product quantity, delivery date, cost, etc. in the management/control of production sites.

Extended functions using Ethernet

FTP Server Function

The upstream PCs can read/write the data from/on V8. The data is transmitted in universal communication protocol and no additional application software is necessary.

Remote Desktop Function

The screen of the server PC can be displayed on V8 via Ethernet. Operation manuals saved in the PC can be checked on V8, which is a feature that decrease operation errors.

Under Development

Replay of Web Camera Images (Motion JPEG)

Images captured by a web camera can be displayed on V8. This function helps to monitor the entire production line.

Available in autumn 2008

Document Display

With V-SFT ver.5, you can easily display various kinds of documents such as pdf files on V8.

Application software for low-cost connection of the office to the production site TELLUS and V-Server
Enhancing production performance with remote operation and data collection functions

With V-Server, you can monitor and control machines that are operated at a remote production site, even overseas, from your office via the Internet/Ethernet at low cost. By combining the network function and the server function of Ethernet and the Internet, it is possible to conduct alarm message transmission, remote monitoring, and collection and analysis of errors. Your production efficiency can be improved by preventing trouble and decreasing the downtime of your machines.

Main features


- Collecting and saving PLC data
- Collecting and saving sampling data of V8
- Controlling and transferring recipe data
- Monitoring alarm condition and sending alarm mail
- Controlling data with PC application software by means of DDE function
- Transferring V8 screen program via Ethernet




For further information, please refer to our TELLUS and V-Server catalog.

Dimensions and Part Names Provided with plentiful kinds of interfaces


V812iS / V812S

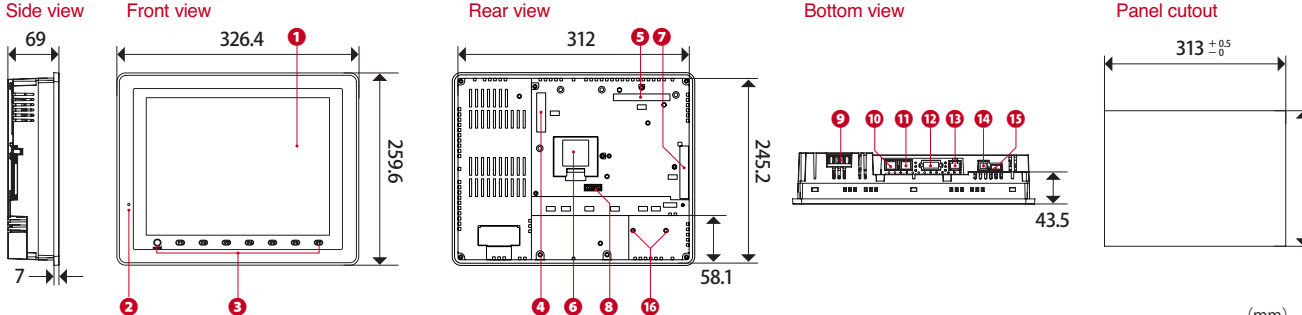


V810iS / V810S / V810iT / V810T / V810iC / V810C

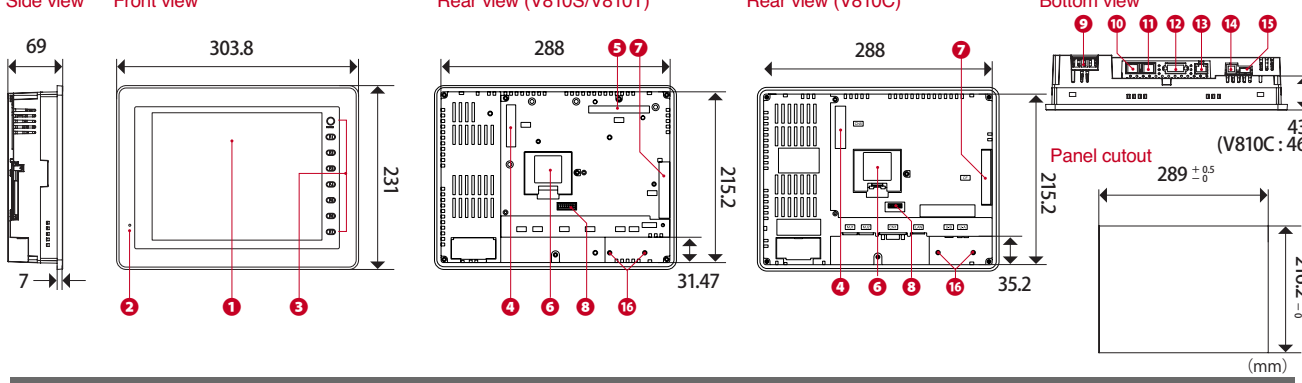

V808iS / V808S / V808iC / V808C

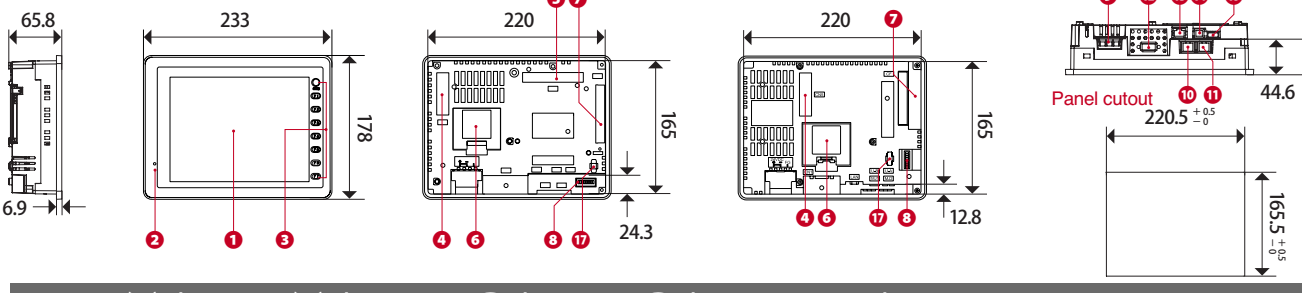

V806iT / V806T / V806iC / V806C / V806iM / V806M




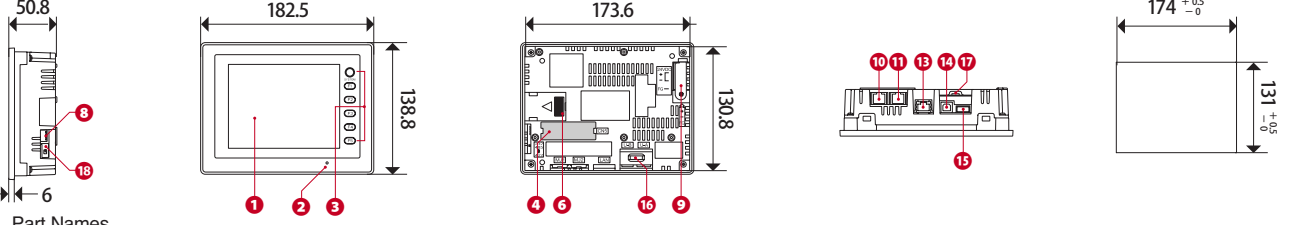


- Part Names
- | | | | |
|--|--|--|---|
| 1 Display | 6 Battery holder | 11 Modular 8-pin for serial port (MJ2) | 16 Screw hole for fixing USB cable lock |
| 2 Power lamp | 7 CF card slot (CF) | 12 D-Sub 9-pin for serial port (CN1) | 17 Inlet port for fixing USB cable |
| 3 Function switch | 8 DIP switch | 13 100BASE-TX/10BASE-T port (LAN) | 18 Slide switch |
| 4 Connector for communication unit (CN5) | 9 Power supply | 14 USB-B (slave) | |
| 5 Connector for optional unit (CN7) | 10 Modular 8-pin for serial port (MJ1) | 15 USB-A (master) | |



System Configuration

Flexible system configuration meets diversified requirements

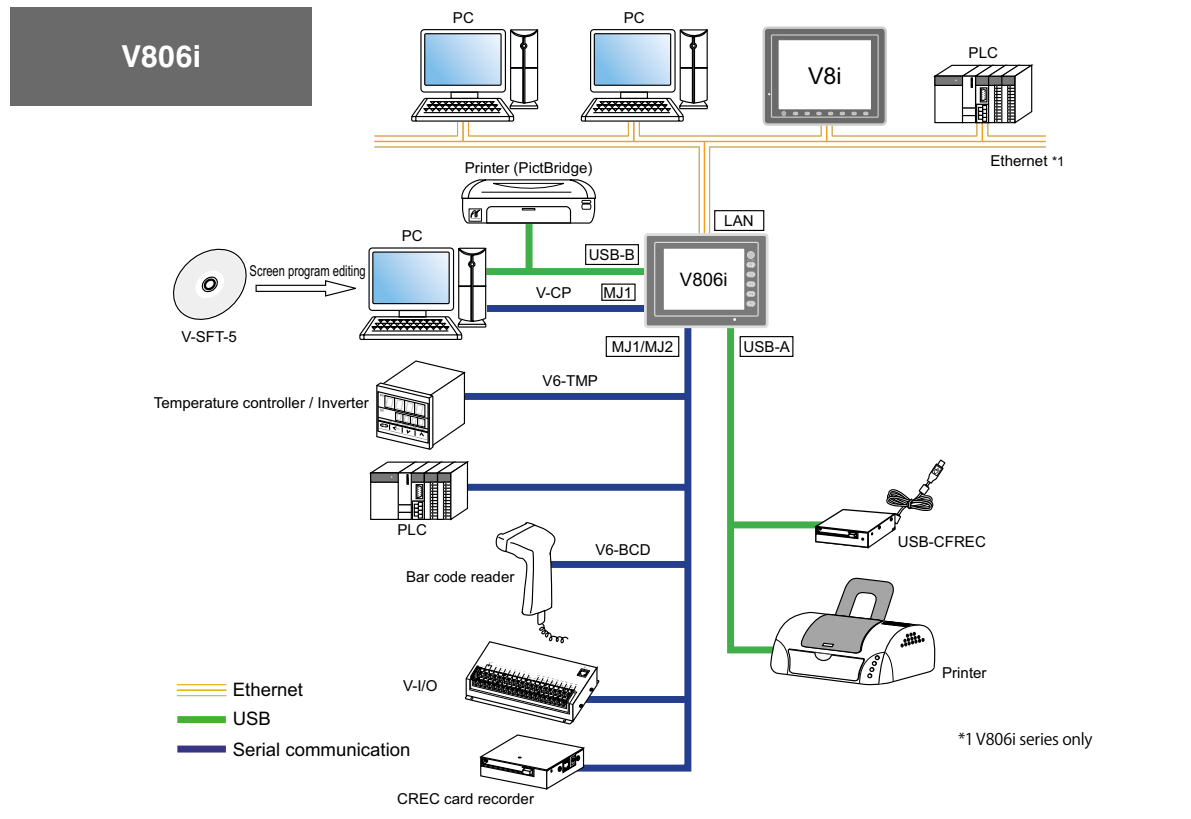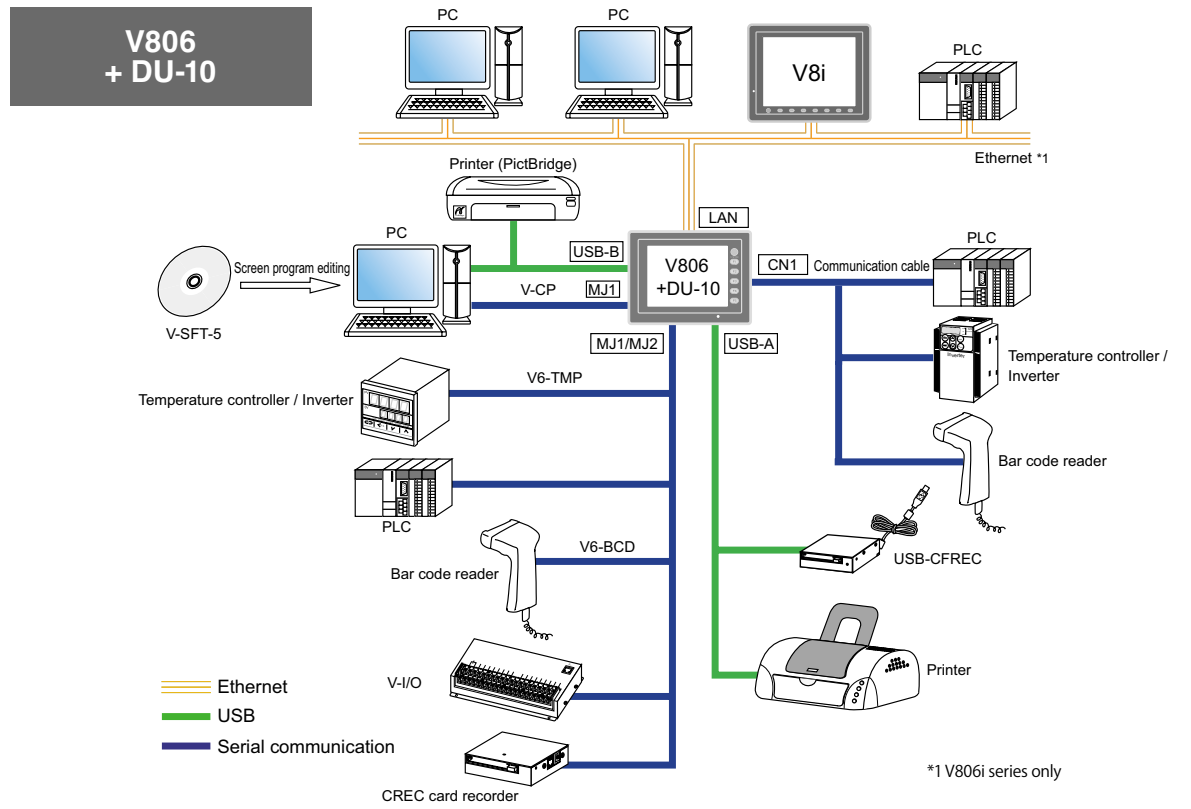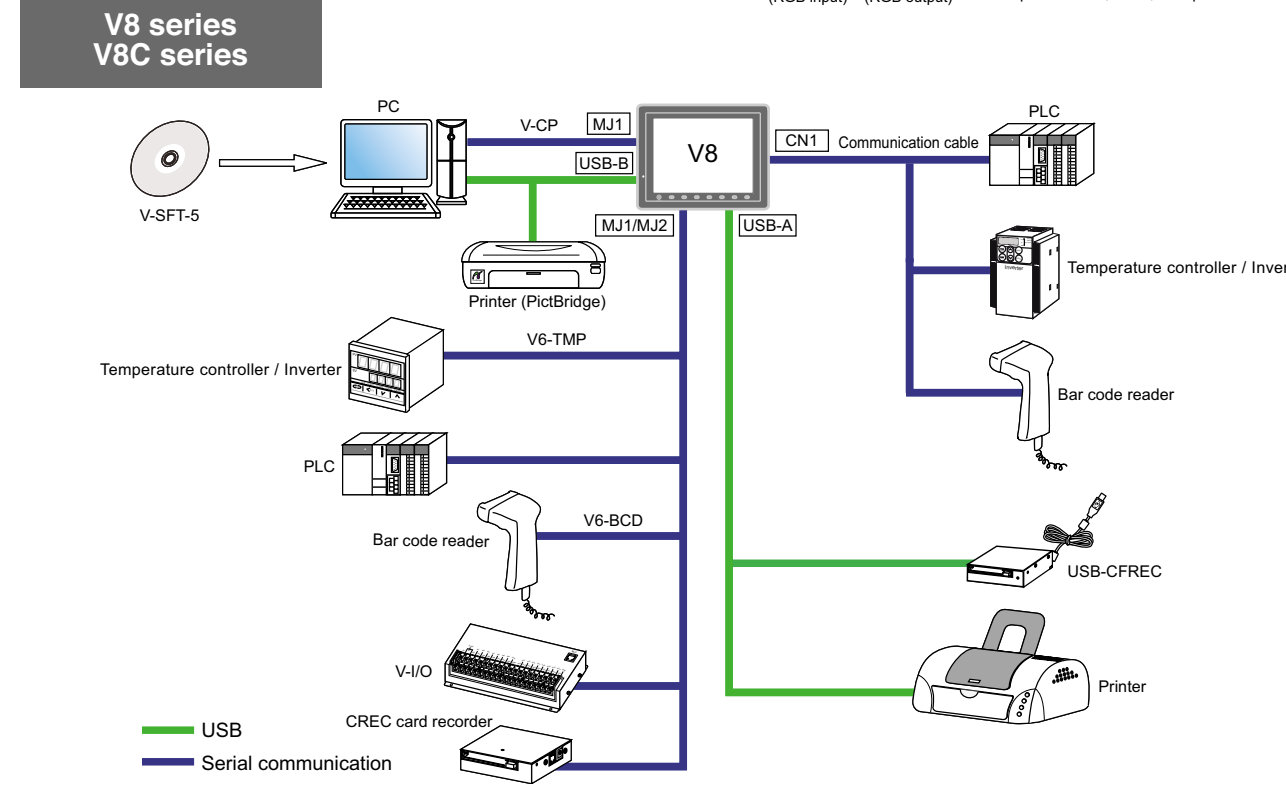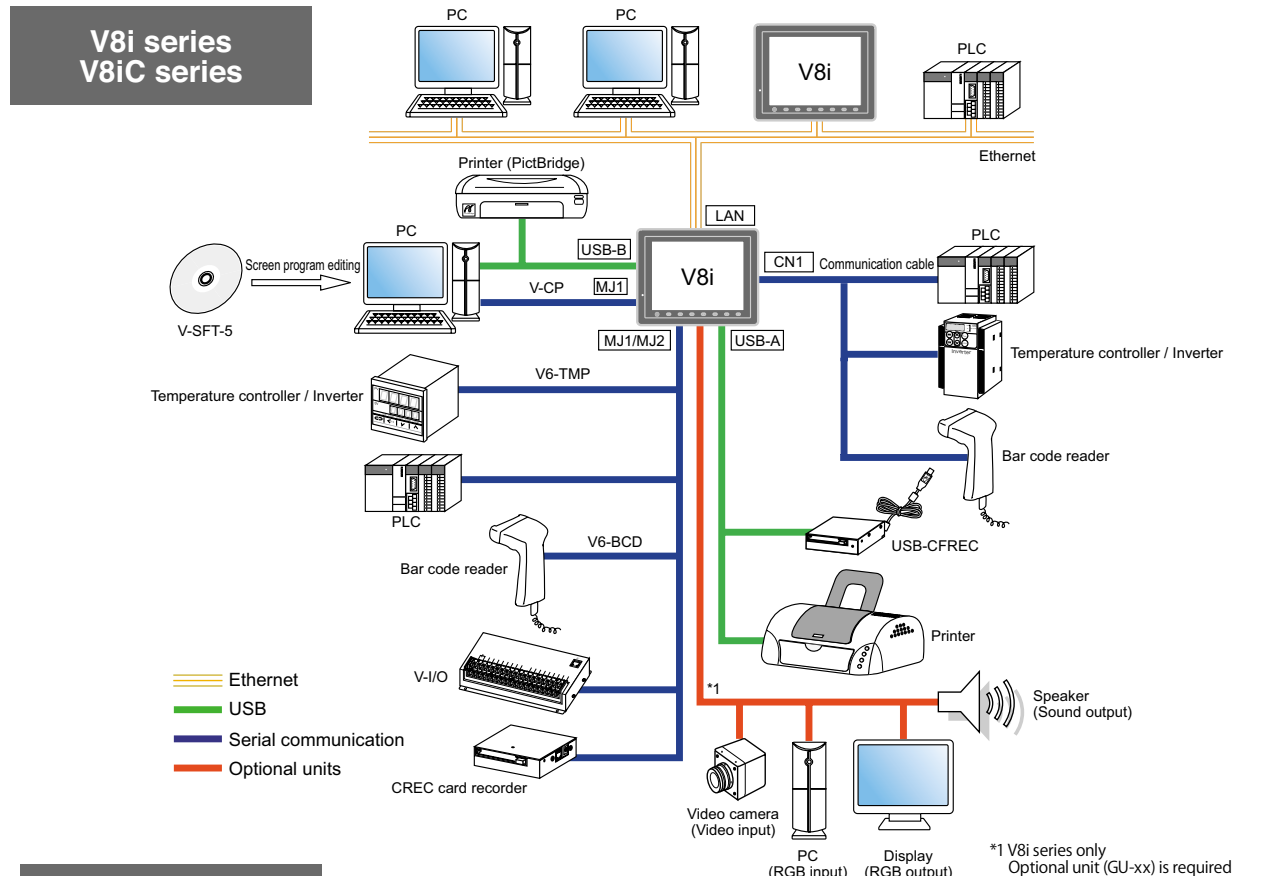

- Products
- Display/Operation Features
- Communication Features
- Expandability
- Usability
- Configuration Software (V-SFT)
- Component Parts
- Expandability with MES/Ethernet
- Dimensions and Part Names
- System Configuration**
- Specifications
- Option
- Option List
- Customer Service
- Product Warranty

- Products
- Display/Operation Features
- Communication Features
- Expandability
- Usability
- Configuration Software (V-SFT)
- Component Parts
- Expandability with MES/Ethernet
- Dimensions and Part Names
- System Configuration**
- Specifications
- Option
- Option List
- Customer Service
- Product Warranty



Specifications

High-end specifications open up new possibilities.

General Specifications

Item	Model	V812		V810			
		V812xS	V812xSD	V810xS/V810xT	V810xC	V810xSD/V810xTD	V810xCD
Power supply	Rated voltage	100-240V AC	24V DC	100-240V AC		24V DC	
	Permissible range of voltage	100-240V AC±10%	24V DC±10%	100-240V AC±10%		24V DC±10%	
	Permissible momentary power failure	Within 20ms	Within 1ms	Within 20ms		Within 1ms	
	Demand (maximum rating)	70VA or less	30W or less	70VA or less	60VA or less	25W or less	20W or less
	Inrush current	20A,10ms(100V AC) 40A,10ms(200V AC)	20A,2ms	20A,10ms(100V AC) 40A,10ms(200V AC)	16A,6ms(100V AC) 32A,7ms(200V AC)	20A,2ms (24V DC)	20A,1ms (24V DC)
Insulation resistance	500V DC,10MΩ or more						
Physical environment	Ambient temperature	0°C ~ +50°C *1					
	Storage temperature	-10°C ~ +60°C					
	Ambient humidity	85%RH or less(without dew condensation, Max. wet bulb temperature: 39°C or lower) *1					
	Resistance to solvent	No attachment of cutting oil or organic solvent					
	Atmosphere	Not exposed to corrosive gas or conductive dust					
	Operation altitude	2,000 meter or lower					
Mechanical operating conditions	Resistance to oscillation	Vibration frequency: 10~150Hz, acceleration: 9.8m/s ² (1.0G) pulsating width: 0.075mm, X,Y,Z: 3 directions 1 hour each way					
	Resistance to shock	Pulse shape: half-sine, peak acceleration: 147m/s ² (15G), X,Y,Z: 3 directions, six times each way					
	Noise proof	1500Vp-p (pulse width 1μs, pulse rise time : 1ns)					
	Static discharge	Complies with IEC61000-4-2, contact: 6kV, air: 8kV					
	Grounding	Grounding resistance : Less than 100Ω , FG/SG separation					
Installation conditions	Structure	Protect structure: Front panel: Compatible with IP65 (when water-proof gasket is used.) Rear cover: Compatible with IP20 Form: Single unit Installation method: Panel mounting					
	Cooling system	Natural air cooling					
	Weight	Approx.2.9kg		Approx.2.5kg			
	Dimensions W*H*D(mm)	326.4x259.6x69.0		303.8x231.0x69.0			
	Panel cutout (mm)	313.0x246.2 (+0.5/-0)		289.0x216.2 (+0.5/-0)			
Case color	Gray						
Material	PC/ABS						

* 1 Keep wet bulb temperature under 39°C to avoid an accident.
* 2 Contamination level is an index that shows the incidence rate of conductive substance. At Level 2, only nonconductive substance is produced, but a temporary conductive state may occur due to dew concentration.

Performance Specifications

Item	Model	V812iS	V812S	V810iS	V810S	V810iT	V810T	V810iC	V810C	
		Screen memory	12.5MB							
Display specifications	Display device	TFT color LCD								
	Resolution W*H(dots)	800x600			640x480					
	Display size	12.1 inches		10.4 inches						
	Colors	65,536 colors (without blinks) / 32,768 colors (with blinks)								
	Backlight	CCFL								
	Backlight life *4	About 50,000 hours						About 75,000 hours		About 58,000 hours
	Backlight Auto OFF	Lit in normal (Set by the user)								
	Power lamp	Lit in normal condition, blinks in alarm condition such as blowout of backlight bulbs								
	Contrast adjustment	Fixed								
	Brilliance control	3 levels (Adjusted into 128 grades by macro command)								
Number of characters	1/2-byte	100 columns x 75 lines			80 columns x 60 lines					
	1-byte	100 columns x 37 lines			80 columns x 30 lines					
	2-byte	50 columns x 37 lines			40 columns x 30 lines					
Enlargement of characters	X: 1 ~ 8 times Y: 1 ~ 8 times									
Touch switch	Switch resolution	Analog: 1,024x1,024 Matrix: 50x30		Analog: 1,024x1,024		Analog: 1,024x1,024 Matrix: 40x24				
	Mechanical life	1 million times or more								
	Surface treatment	Hard coating, Non glare finish 5%								
Function switch	Number of function switches	8 switches								
External interface	D-Sub 9-pin (CN1)	RS-232C, RS-422/485, Asynchronous type, Data length : 7,8 bits, Parity : even, odd, none, Stop bit : 1,2 bits, Baud rate : 4800, 9600, 19200, 38400, 57600, 76800, 115200,187500 ⁵ bps								
	Modular 8-pin (MJ1/ MJ2)	RS-232C, RS-422/485 (two-wire system), Asynchronous type, Data length : 7,8 bits, Parity : even, odd, none, Stop bit : 1,2 bits, Baud rate : 4800, 9600, 19200, 38400, 57600, 76800, 115200 bps								
	CF card interface	Compatible with CompactFlash™								
	Ethernet	Complies with IEEE802.3 Baud rate: 100Mbps, 10Mbps Cable: 100Ω Unsealed twist pair, Category 5, Max length: 100m								
	USB	Type A, Type B (Ver.1.1)								
Clock & Back up memory	Battery	Coin-type lithium primary battery								
	Back up memory (SRAM)	512KB						128KB		
	Back up period	5 years (Ambient temperature 25°C)								
	Calendar accuracy	Gap±90 sec. per month (Ambient temperature 25°C)								

* 4 When the panel surface luminance drops to 50% of the initial value at normal temperature (25°C)
* 5 Available only when connected with SIEMENS MPI.

General Specifications


Item	Model	V808		V806
		V808xSD	V808xCD	V806
Power supply	Rated voltage	24V DC		
	Permissible range of voltage	24V DC±10%		
	Permissible momentary power failure	Within 1ms		
	Demand (maximum rating)	23W or less	20W or less	17W or less
	Inrush current	20A,2ms(24V DC)	20A,1ms(24V DC)	16A or more
Insulation resistance	500V DC,10MΩ or more			
Physical environment	Ambient temperature	0°C ~ +50°C		
	Storage temperature	-10°C ~ +60°C		
	Ambient humidity	85%RH or less(without dew condensation, Max. wet bulb temperature: 39°C or lower)*1		
	Resistance to solvent	No attachment of cutting oil or organic solvent		
	Atmosphere	Not exposed to corrosive gas or conductive dust		
	Operation altitude	2,000 meter or lower		
Mechanical operating conditions	Resistance to oscillation	Vibration frequency: 10~150Hz, acceleration: 9.8m/s ² (1.0G) pulsating width: 0.075mm, X,Y,Z: 3 directions 1 hour each way		
	Resistance to shock	Pulse shape: half-sine, peak acceleration: 147m/s ² (15G), X,Y,Z: 3 directions, six times each way		
	Noise proof	1500Vp-p (pulse width 1μs, pulse rise time : 1ns)		
	Static discharge	Complies with IEC61000-4-2, contact: 6kV, air: 8kV		
	Grounding	Grounding resistance : Less than 100Ω , FG/SG separation		
Installation conditions	Structure	Protect structure: Front panel: Compatible with IP65 (when water-proof gasket is used.) Rear cover: Compatible with IP20 Form: Single unit Installation method: Panel mounting		
	Cooling system	Natural air cooling		
	Weight	Approx.1.5kg		Approx.740g
	Dimensions W*H*D(mm)	233.0x178.0x65.8		182.5x138.8x50.8
	Panel cutout (mm)	220.5x165.5 (+0.5/-0)		174x131 (+0.5/-0)
Case color	Gray			
Material	PC/ABS			

* 1 Keep wet bulb temperature under 39°C to avoid an accident.
* 2 Contamination level is an index that shows the incidence rate of conductive substance. At Level 2, only nonconductive substance is produced, but a temporary conductive state may occur due to dew concentration.

Performance Specifications

Item	Model	V808iS	V808S	V808iC	V808C	V806iT	V806T	V806iC	V806C	V806iM	V806M		
		Screen memory	12.5MB		4.5MB								
Display specifications	Display device	TFT color LCD			STN color LCD		STN monochrome LCD						
	Resolution W*H(dots)	800x600		640x480		320x240							
	Display size	8.4 inches			5.7 inches								
	Colors	65,536 colors (without blinks) / 32,768 colors (with blinks)								16 grayscale (with blinks)			
	Backlight	CCFL											
	Backlight life *4	About 50,000 hours						About 75,000 hours		About 58,000 hours			
	Backlight Auto OFF	Lit in normal (Set by the user)											
	Power lamp	Lit in normal condition, blinks in alarm condition such as blowout of backlight bulbs											
	Contrast adjustment	Fixed						Adjustable (Function switch or macro switch)					
	Brilliance control	3 levels (Adjusted into 128 grades by macro command)											
Number of characters	1/2-byte	100 columns x 75 lines		80 columns x 60 lines		40 columns x 30 lines							
	1-byte	100 columns x 37 lines		80 columns x 30 lines		40 columns x 15 lines							
	2-byte	50 columns x 37 lines		40 columns x 30 lines		20 columns x 15 lines							
Enlargement of characters	X: 1 ~ 8 times Y: 1 ~ 8 times												
Touch switch	Switch resolution	Analog: 1,024x1,024											
	Mechanical life	1 million times or more											
	Surface treatment	Hard coating, Non glare finish 5%											
Function switch	Number of function switches	8 switches				6 switches							
External interface	D-Sub 9-pin (CN1) *6	RS-232C, RS-422/485, Asynchronous type, Data length : 7,8 bits, Parity : even, odd, none, Stop bit : 1,2 bits, Baud rate : 4800, 9600, 19200, 38400, 57600, 76800, 115200,187500 ⁵ bps				RS-232C, RS-422/485 (two-wire system), Asynchronous type, Data length : 7,8 bits, Parity : even, odd, none, Stop bit : 1,2 bits, Baud rate : 4800, 9600, 19200, 38400, 57600, 76800, 115200 bps							
	Modular 8-pin (MJ1/ MJ2)	RS-232C, RS-422/485 (two-wire system), Asynchronous type, Data length : 7,8 bits, Parity : even, odd, none, Stop bit : 1,2 bits, Baud rate : 4800, 9600, 19200, 38400, 57600, 76800, 115200 bps				RS-232C, RS-422/485, Asynchronous type, Data length : 7,8 bits, Parity : even, odd, none, Stop bit : 1,2 bits, Baud rate : 4800, 9600, 19200, 38400, 57600, 76800, 115200 bps							
	CF card interface	Compatible with CompactFlash™											
	Ethernet	Complies with IEEE802.3 Baud rate: 100Mbps, 10Mbps Cable: 100Ω Unsealed twist pair, Category 5, Max length: 100m											
	USB	Type A, Type B (Ver.1.1)											
Clock & Back up memory	Battery	Coin-type lithium primary battery											
	Back up memory (SRAM)	512KB		128KB		512KB		128KB		512KB		128KB	
	Back up period	5 years (Ambient temperature 25°C)											
	Calendar accuracy	Gap±90 sec. per month (Ambient temperature 25°C)											

* 4 When the panel surface luminance drops to 50% of the initial value at normal temperature (25°C)
* 5 Available only when connected with SIEMENS MPI.
* 6 For V806 series, available only when equipped with DU-10 (option).



Option Units

Optional units that expand V8's performance

Various units for greater expandability and usability


Expansion/ Communication Units

- Expansion units**
 - GU-00(Video input + sound output unit)**
Displays images from a video camera on V8 and outputs sound files through external speakers.
 - GU-01(USB input + sound output unit)**
Displays PC images on V8 and outputs sound files through external speakers.
 - GU-02(USB output + sound output unit)**
Displays images of V8 on PC display and outputs sound files through external speakers.
 - GU-03(Sound output unit)**
Outputs sound files through external speakers.
 - GU-10(Video input(2ch) + RGB input)**
Displays images from video cameras and PC images on V8 simultaneously.
 - GU-11(USB input(2ch))**
Displays RGB images such as PC images through two channels on V8 simultaneously.
 - DU-10(V806)**
Compatible with a D-Sub9pin/CF card



Application Software


- Configuration software**
 - V-SFT-5(Ver.5)**
For Windows98/Me/NT Version4.0/2000/XP/XP 64 Edition/Vista 32bit



Cables

Type	Configuration	Connected to
V-CP	RS-232C Modular 8-pin D-Sub 9-pin Length: 3 m	PC
V6-BCD	RS-232C Modular 8-pin Length: 3 m	Bar code reader
V6-MLT	RS-422 Modular 8-pin Length: 3 m	MONITOUCH V8/V7/V6 series
V6-TMP	RS-232C/485 Modular 8-pin Length: 3, 5 or 10 m	Temperature controller and inverter etc.
UA-FR	1000 + 50 USB-CFREC	Card reader/writer
UB-FR	1000 + 50 PC PictBridge Printer	Printer

Communication units



XX	Compatible network	XX	Compatible network
00	OPCN-1 ¹⁾	04	PROFIBUS-DP
01	T-Link	06	SX bus
02	CC-Link ¹⁾	07	DeviceNet ¹⁾
03-3	Ethernet ¹⁾	08	FL-net ¹⁾

Connected to various networks. Multiple V8 panels can be connected to one PLC. Other devices can be linked to the network, improving system's cost-effectiveness.
*1 Under development

Optional units

- USB-CFREC (USB ports for CF card recorder)**
Used for recording or reading data onto or from a CF card. Fitted on the front of the panel.
- TC-D9 (Terminal converter)**
Connects V8 with other units via RS-422/485 terminal.
- CREC (Card recorder)**
Used for recording data onto a card for back-up. Also used for recording data by memory manager or data logging functions.
- V-MDD (ACPU/QnACPU/FXCPU dual port interface)**
Used to double the port of the connector for programmer units. Useful when connecting to ACPU/QnACPU/FXCPU(MITSUBISHI) directly.

- V7-BT (Battery)**
Lithium battery for V8 series
- V8xx-GS/V8xx-GSN10**
Protection sheet for panels: 5 sheets per set. N10 is a non-glare type sheet. See P29 for details.
- V8xxx-FL**
Backlight for V8
See P29 for details.
- Panel Adapter**
Used when fitting V8 into V4/GD-80/GD-65/GD-64 panel cutout.

Option List

Optional units that expand V8's performance

Expansion / Communication units

Type	Model																	
	V8 Series																	
	V812iS	V812S	V810iS	V810S	V810iT	V810T	V810iC	V810C	V808iS	V808S	V808iC	V808C	V806iT	V806T	V806iC	V806C	V806iM	V806M
Expansion units																		
GU-00	○		○		○													
GU-01	○		○		○													
GU-02	○		○		○													
GU-03	○		○		○													
GU-10	○		○		○													
GU-11	○		○		○													
DU-10														○	○	○	○	○
Communication units																		
CU-00	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
CU-01	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
CU-02	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
CU-03-3	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
CU-04	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
CU-06	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
CU-07	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○

Others

Type	Model																	
	V8 Series																	
	V812iS	V812S	V810iS	V810S	V810iT	V810T	V810iC	V810C	V808iS	V808S	V808iC	V808C	V806iT	V806T	V806iC	V806C	V806iM	V806M
Protection sheet																		
V812-GS	○	○																
V812-GSN10	○	○																
V810-GS			○	○	○	○	○	○										
V810-GSN10			○	○	○	○	○	○										
V808-GS									○	○	○	○						
V808-GSN10									○	○	○	○						
V806-GS													○	○	○	○	○	○
V806-GSN10													○	○	○	○	○	○
Backlight																		
V812-FL	○	○																
V810-FL			○	○	○	○	○	○										
V808S-FL									○	○								
V808C-FL											○	○						
Panel adapter																		
PAD-V610				○	○	○	○	○										
PAD-V610-01				○	○	○	○	○										
PAD-V608									○	○	○	○						
PAD-V608-01									○	○	○	○						
PAD-V606													○	○	○	○	○	○

* 1 DU-10

Cables

Type	Model																	
	V8 Series																	
	V812iS	V812S	V810iS	V810S	V810iT	V810T	V810iC	V810C	V808iS	V808S	V808iC	V808C	V806iT	V806T	V806iC	V806C	V806iM	V806M
V-CP	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
V6-BCD	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
V6-MLT	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
V6-TMP-3M/V6-TMP-5M/V6-TMP-10M	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
UA-FR	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○
UB-FR	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○	○



Customer Service

Global service network

Please contact our customer service department for information and advice.

TEL

Tel +81-76-274-2144

FAX

Fax +81-76-274-5208

E-mail

sales@hakko-elec.co.jp

Website

<http://www.monitouch.com>

Includes FAQs for troubleshooting, instruction manuals, sample screens, and information for upgrading of configuration software.

<http://www.monitouchv8.com>

MONITOUCH V8 series
Visit our website for MONITOUCH V8 Series.



Global Sales Network

Our distributors are ready to support your worldwide business.

<http://www.hakko-elec.co.jp/en/distributors/index.html>



Product Warranty

To the purchasers of Hakko Electronics products:

The warranty of this product is as follows, unless there are special instructions that state otherwise in the quote, contract, catalog, or specifications at the time of the quote or order.

The purpose or area of use may be limited, and a routine checkup may be required depending on the product. Please contact the distributor from which you purchased the product, or Hakko Electronics for further information.

Please conduct inspection of the product promptly upon purchase or delivery. Also, please give sufficient consideration to management and maintenance of the product prior to accepting it.

1. Period and Coverage of the Warranty

1-1 Period

- (1) The period of the warranty is effective until twenty-four (24) months from the date of manufacture printed on the plate.
- (2) The above period may not be applicable if the particular environment, conditions or frequency of use affects the lifetime of the product.
- (3) The warranty for the parts repaired by Hakko Electronics' service department is effective for six (6) months from the date of repair.

1-2 Coverage

- (1) If malfunction occurs during the period of warranty due to negligence on the part of Hakko Electronics, the malfunctioning parts are exchanged or repaired free of charge at the point of purchase or delivery. However, the warranty does not apply to the following cases:
 - 1) The malfunction occurs due to inappropriate conditions, environment, handling or usage that is not specified in the catalog, instruction book or users' manual.
 - 2) The malfunction is caused by factors that do not originate in the purchased or delivered product.
 - 3) The malfunction is caused by another device or software design that does not originate in a Hakko Electronics product.
 - 4) The malfunction occurs due to an alteration or repair that was not performed by Hakko Electronics.
 - 5) The malfunction occurs because the expendable parts listed in the instruction book or catalog were not maintained or replaced in an appropriate manner.
 - 6) The malfunction occurs due to factors that were not foreseeable by the practical application of science and technology at the time of purchase or delivery.
 - 7) The malfunction occurs because the product is used for a purpose other than that for which it is intended.
 - 8) The malfunction occurs due to a disaster or natural disaster that Hakko Electronics is not responsible for.
- (2) The warranty is only applicable to the single purchased and delivered product.
- (3) The warranty is only valid for the conditions stated in (1) above. Any damage induced by the malfunction of the purchased or delivered product, including damage or loss to a device or machine and passive damage, is not covered by the warranty.

1-3 Malfunction Diagnosis

The initial diagnosis of malfunction is to be made by the purchaser. The diagnosis can be conducted by Hakko Electronics or its delegated service provider with due charge upon the request of the purchaser. The charge is to be paid by the purchaser at the rate stipulated in the rate schedule of Hakko Electronics.

2. Liability for Opportunity Loss

Regardless of the time of occurrence, Hakko Electronics is not liable for damage caused by factors that Hakko Electronics is not responsible for, opportunity loss on the part of the purchaser caused by the malfunction of a Hakko Electronics product, passive damage, damage due to a special situation regardless of whether it was foreseeable or not, or secondary damage, accident compensation, damage to products that were not manufactured by Hakko Electronics, or compensation towards other operations.

3. Period for Repair and Provision of Spare Parts after Production is Discontinued (Maintenance Period)

Discontinued models (products) can be repaired for seven (7) years from the date of discontinuation. Also, most spare parts used for repair are provided for seven (7) years from the date of discontinuation. However, some electric parts may not be available due to their short life cycle. In this case, it may be difficult to repair or provide the parts during the seven-year period. Please contact Hakko Electronics or its service providers for further information.

4. Delivery

Standard products that do not entail application setting or adjustment are regarded as received by the purchaser upon delivery. Hakko Electronics is not responsible for local adjustments and test runs.

5. Service

The price of the delivered or purchased products does not include the service fee for the technician. Please contact Hakko Electronics or its service providers for further information.

6. Scope of Application

The above contents shall be assumed to apply to transactions and product use in the country where a Hakko Electronics product is purchased. Please consult your local supplier or Hakko Electronics for details.

Driver List (PLCs)

	Supported
	Control Logix/Compact Logix
	Control Logix(Ethernet)
	SLC500
	Micro Logix
	Micro Logix (Ethernet)
	Direct LOGIC(K-Sequence)
	Direct LOGIC(Modbus RTU)
Baumuller	BMx-x-PLC
EATON Cutler-Hammer	ELC
FATEK AUTOMATION	FACON FB series
	MICREX-F series
	MICREX-F series V4 Compatible
	MICREX-F Tlink
	MICREX-F Tlink V4 Compatible
	SPB(N mode)&FLEX-PC serie
	SPB(N mode)&FLEX-PC CPU
	MICREX-SX(Tlink)
	MICREX-SX(OPCN-1)
	MICREX-SX(SX bus)
	MICREX-SX SPH/SPB series
	MICREX-SX SPH/SPB CPU
	MICREX-SX(Ethernet)
	HIDIC-H
	HIDIC-H (Ethernet)
	HIDIC-EHV
	HIDIC-EHV(Ethernet)
	HIDIC-S10/2α,S10mini
	HIDIC-S10/2α,S10mini(Ethernet)
	HIDIC-S10V
IDEC	HIDIC-S10V(Ethernet)
	MICRO SMART
	TOYOPUC
	TOYOPUC(Ethernet)
	KV10/24 CPU
	KV-700
	KV-700(Ethernet TCP/IP)
	KV-1000
	KV-1000(Ethernet TCP/IP)
	KV-3000/5000
	KV-3000/5000 (Ethernet TCP/IP)
	SU/SG(K-Sequence)
	SU/SG(Modbus RTU)
	MASTER-KxxxS
	MASTER-KxxxS CNET
	XGT/XGK series CPU
	XGT/XGK series
	MEWNET
	FP series (Ethernet TCP/IP)
	FP series (Ethernet UDP/IP)
	A series link
	A series CPU
	QnA series link
	QnA series CPU
	QnA series (Ethernet)
	QnH(Q) series link
	QnH(Q) series CPU
	Q00J/00/01 CPU
	QnH(Q) series (Ethernet)
	QnH(Q) series link (Multi CPU)
	QnH(Q) series (Multi CPU) (Ethernet)
	QnH(Q) series CPU(Multi CPU)
	FX2N series CPU
	FX series link (A-prt)
	FX-3UC series CPU
	N7X/NX Plus series (70P/700P/750P/CCU+)
	N7/NX series (70/700/750/CCU)
	SYSMAC C
	SYSMAC CS1/CJ1
	SYSMAC CS1/CJ1(Ethernet)
	SYSMAC CS1/CJ1(Ethernet Auto)
	PCD
	PCD S-BUS(Ethernet)
	N Plus
	SECNET
	S7-300/400MPI
	S7 PROFIBUS-DP
	S7-200 PPI
	S7-300/400(Ethernet)
	JW series
	JW 100/70H COM port
	JW20 COM port
SHINKO ELECTRIC	SELMART
TECO	TP-03
UNITRONICS	M90/91/Vision Series (ASCII)
	MEMOBUS
	CP9200SH/MP900
	MP2300(MODBUS TCP/IP)
	CP/MP EXPANSION MEMOBUS (UDP/IP)
	FA-M3
	FA-M3R
	FA-M3/FA-M3R(Ethernet UDP/IP)
	FA-M3/FA-M3R(Ethernet TCP/IP)
	MODBUS RTU(Free Format)
	MODBUS TCP/IP(Ethernet)
	Universal Serial
	Barcode
	V-Link
	ModbusRTU Slave
	ModbusTCP/IP Slave
	Wit

Driver List (Thermo controllers, inverters, etc.)

		Supported
DELTA TAU DATA SYSTEMS	PMAC	<input type="radio"/>
	PMAC (Ethernet)	<input type="radio"/>
Fuji Electric	PYX(MODBUS RTU)	<input type="radio"/>
	PXR(MODBUS RTU)	<input type="radio"/>
	PXG(MODBUS RTU)	<input type="radio"/>
	PXH(MODBUS RTU)	<input type="radio"/>
	F-MPC04P(Loader)	<input type="radio"/>
	F-MPC series /FePSU	<input type="radio"/>
	FVR-E11S(MODBUS RTU)	<input type="radio"/>
	FVR-C11S(MODBUS RTU)	<input type="radio"/>
	FRENIC5000G11S/P11S(MODBUS RTU)	<input type="radio"/>
	FRENIC5000VG7S(MODBUS RTU)	<input type="radio"/>
	FRENIC-Mini(MODBUS RTU)	<input type="radio"/>
	FRENIC-Eco(MODBUS RTU)	<input type="radio"/>
	FRENIC-Multi(MODBUS RTU)	<input type="radio"/>
	FRENIC-MEGA(MODBUS RTU)	<input type="radio"/>
	HFR-C9K	<input type="radio"/>
	HFR-C11K	<input type="radio"/>
	PPMC(MODBUS RTU)	<input type="radio"/>
	FALDIC-α series	<input type="radio"/>
	PHR(MODBUS RTU)	<input type="radio"/>
	WA5000	<input type="radio"/>
	PUM(MODBUS RTU)	<input type="radio"/>
	ALPHA5	<input type="radio"/>
	APR-N series (MODBUS RTU)	<input type="radio"/>
WE1MA series (MODBUS RTU)	<input type="radio"/>	
IAI	X-SEL	<input type="radio"/>
	PCON/ACON/SCON(MODBUS RTU)	<input type="radio"/>
Mitsubishi Electric	FR-V500	<input type="radio"/>
	FR-*500	<input type="radio"/>
OMRON	E5AR/E5ER	<input type="radio"/>
	E5AN/E5EN/E5CN/E5GN	<input type="radio"/>
	V600/620	<input type="radio"/>
RKC Instruments	SR-Mini(MODBUS RTU)	<input type="radio"/>
	CB100/CB400/CB500/CB700/CB900(MODBUS RTU)	<input type="radio"/>
	SR-Mini(Standard Protocol)	<input type="radio"/>
	SRV(MODBUS RTU)	<input type="radio"/>
	MA900/MA901(MODBUS RTU)	<input type="radio"/>
	SRZ(MODBUS RTU)	<input type="radio"/>
SanRex	DC AUTO (HKD type)	<input type="radio"/>
SHINKO TECHNOS	DCL-33A	<input type="radio"/>
	FC Series	<input type="radio"/>
SUNX	LP-400	<input type="radio"/>
TOHO ELECTRONICS	TTM-00BT	<input type="radio"/>
	TTM-200(MODBUS RTU)	<input type="radio"/>
TOSHIBA	VF-A7	<input type="radio"/>
Yamatake	SDC35/36	<input type="radio"/>
	DMC10	<input type="radio"/>
	DMC50(COM)	<input type="radio"/>
Yokogawa M&C	UT100	<input type="radio"/>
	UT750	<input type="radio"/>
	UT550	<input type="radio"/>
	UT520	<input type="radio"/>
	UT450	<input type="radio"/>
	UT350	<input type="radio"/>
	UT320	<input type="radio"/>
	UT2400/2800	<input type="radio"/>